Contents

Rules first, examples after, tests at the back. If two pages disagree, the page with the lower number wins and the other one is a bug. Tell the owner on page 35.

01 to 14: anyone who puts the HeyDiff name on something · 15 to 32: people who design and build the product · Appendix: tests and research, kept for the record

BRAND / IDENTITY

01 **Cover** — The promise in one line.
02 **Positioning** — Who HeyDiff is for and what it believes.
03 **Logo** — The mark and the lockup.
04 **Lockup and spacing** — Proportions, clear space, minimum size.
05 **Logo use** — Backgrounds, versions, misuse.
06 **Name** — Writing HeyDiff in text.
07 **Artwork and gradients** — Colour stops, directions, crops.

BRAND / EXPRESSION

08 **Colour palette** — Brand colours and what they mean.
09 **Product colour** — Light and dark tokens, statuses.
10 **Typography** — Typefaces, scale, rules.
11 **Voice** — How HeyDiff talks.
12 **Visual language** — Icons, illustration, screenshots.
13 **In use** — The system on real surfaces.
14 **Templates** — Social, slides, email, docs.

EXAMPLES AND ASSETS

33 **Example screen** — Comments list, light and dark.
34 **Landing page** — heydiff.com, light and dark.
35 **Assets and ownership** — Files, owners, how to change this guide.

PRODUCT / FOUNDATIONS AND COMPONENTS

15 **Layout** — Spacing, grid, breakpoints, layers.
16 **Tokens** — Semantic tokens, motion, targets.
17 **Components** — HeroUI v3 with the HeyDiff theme.
18 **Component rules** — Buttons, toasts, the spec format.
19 **Navigation** — Sidebar, tabs, breadcrumbs, pages.
20 **Overlays and menus** — Dialogs, drawers, popovers, menus.
21 **Forms** — Fields, validation, layout.
22 **System feedback** — Loading, empty, error, offline.
23 **Tables** — Sort, filter, select, bulk actions.
24 **Files, search and structure** — Uploads, command menu, details.

PRODUCT / HEYDIFF

25 **Pins and threads** — Pin, outline, composer, thread.
26 **Decisions and agents** — Context, decision card, agent run.
27 **Code and selections** — Code blocks, selections, diffs.
28 **Giving feedback** — Pick, write, draw, send.
29 **Chrome extension** — Toolbar, menus, side panel, popup.
30 **Mac app** — Menu bar, picking in apps, shoot again.
31 **Journey** — Pin to resolved, light and dark.
32 **Journey on a phone** — The same flow on a phone.

APPENDIX / NOT RULES

A1 **Ratio test** — Mark to wordmark ratios we tried.
A2 **Mark exploration** — Speech bubble marks we did not pick.
A3 **Golden ratio research** — Why the lockup is 5:4.
A4 **Wordmark grey test** — Diff in four greys.
A5 **Mark A variations** — Nine ways to add to or change mark A.
A6 **Mark A variations, more** — Nine more, numbered 10 to 18.
A7 **Mark A variations, third set** — Numbered 19 to 27.
A8 **Mark A variations, fourth set** — Numbered 28 to 36.
A9 **Mark A, from what HeyDiff does** — 37 to 45, each from a step of the job or a belief.

heydiff

Build what you pictured.

Feedback for software built with AI, for makers and the teams around them.

FEEDBACK CORAL / THE HEY

Someone sees it could be better

The moment a person notices something and says so. Every idea starts here.

VERSION BLUE / THE BUILD

The software, as it runs

The real thing at its exact version, and the agent that shapes it.

DECISION VIOLET / THE DIFF

What it becomes

Where the two meet: the thing you pictured, built, with everyone who helped shape it.

Who HeyDiff is for, and what it believes

Read this before writing a headline, picking an image or naming a feature. Everything else in this guide serves these lines.

THE PROMISE

Build what you pictured.

DESCRIPTOR

Team feedback for software built with AI.

ONE LINE

HeyDiff turns team feedback into agent-ready software changes.

THE NAME

HeyDiff

Hey is how people start: "Hey, this needs to change."

Diff is what comes back: a concrete change you can check.

People say what should change. Coding agents build it. HeyDiff keeps the two connected.

WHO IT IS FOR

Designed, priced and marketed for two groups

Primary

Product teams building with coding agents

3 to 30 people at startups and scale-ups. Agents write much of the UI. Usually bought by the engineering lead.

Priya (PM), Dana (designer), Ben (engineer)

Primary

Founders and solo builders

Steer agents themselves, start free, bring a team later.

Eva (founder), Hugo (hobby developer)

SUPPORTED, NOT DESIGNED AROUND

Agencies and freelancers with clients as guests. QA and design QA. Engineer-led teams without a designer or PM. When a choice helps a primary group and hurts these, the primary group wins.

THE JOB

Get what is built to match what we meant, with AI agents, without losing why.

1 Notice › 2 Point › 3 Explain › 4 Discuss › 5 Hand off › 6 Implement › 7 Check › 8 Remember

HOW IT SHOULD FEEL

- ✓ Sure that what ships is what was agreed.
- ✓ Not the reviewer who sends vague screenshots in chat.
- ✓ Heard, whoever typed the prompt.
- ✓ In flow with the agent instead of chasing context.

WHAT WE BELIEVE

01

Whoever sees it can say it.

The designer, the PM, the client. Feedback is not reserved for the person typing the prompt.

02

Agents answer to people.

Every request stays open until a person checks the result and resolves it. Agents never resolve.

03

Every change keeps its reason.

The comment, the revision and who resolved it stay linked, so "why is it like this?" takes one click.

04

Built for agents first.

Agents read and report through MCP and the API. The interface is where people look, judge and decide.

WHAT HEYDIFF IS NOT

✕ **A ticket tracker**

Comments live on the running page and link out to Linear or GitHub.

✕ **A design tool**

It works on the software you shipped, not on mockups.

✕ **A coding agent**

Your agent builds. HeyDiff tells it what, and checks it did.

The logo

Two speech bubbles in conversation. Coral speaks first from the left, blue answers from the right, and the violet overlap is what they agree on. Lettering drawn as outlines, set in a 5:4 lockup.

V4 / PRIMARY LOCKUP

01 / CONSTRUCTION



Two bubbles, one square corner each

Each bubble is 40 x 36 with corner radius 6. The outer bottom corner stays square, which makes it a speech bubble. Sheared 16.7 degrees; the front bubble sits 8 right and 4 down.

02 / COLOUR

#FFB46A / #F25A82

#22B7F2 / #226AE6

#9B5CF6 / #6E4EF0

Coral, blue, violet

Coral on the back bubble, blue on the front, Decision Violet in the overlap. Directions, stops and flat colours are on page 07.

03 / WORDMARK

heydiff

Outlines from Plus Jakarta Sans 800

Drawn, not typed

One word, like the domain. The tops of h, d and i and the dot on the i are cut at the mark's angle. y and d sit closer, and ff shares one crossbar.

04 / LOCKUP

mark 5 / wordmark 4 / gap 1

5:4

The mark is 5 parts tall, the wordmark 4, centred on it. Spacing and clear space are on the next page. Always place the supplied files.

Lockup 5:4 and spacing

Every measure comes from the logo itself. u is one fifth of the mark height, e is the height of the lowercase e. Both scale with the logo, so the rules hold at any size.

MARK	**5u**	One fifth of the mark height is the unit u.
WORDMARK	**4u**	Top of the h to the foot of the y, centred on the mark.
GAP	**1u**	One unit, a fifth of the mark height. Picked by eye over 0.85u and 1.15u.
CLEAR SPACE	**1e**	The height of the e on every side, about 45 percent of the mark height. Same distance for the mark on its own. More is fine. App icons and avatars are the exception: the icon edge is the clear space.
MINIMUM SIZE	**24 px**	Lockup 24 px tall, about 92 px wide. Mark on its own 16 px.

Before it goes out

Place the supplied files
Never rebuild the lockup from the mark and a typed word. The files on page 35 already hold the 5:4 ratio and the 1u gap.

Check clear space with the e
Hold the height of the e against every side. Nothing else enters that space, not even a hairline.

Below 24 px, the mark alone
Under 24 px the wordmark stops reading. Use the mark, flat, from 16 px.

Trust the eye on dark
Light shapes on dark look heavier. Use the reverse artwork, which is already corrected.

WHERE THE NUMBERS COME FROM

The ratio and gap tests and the golden ratio research are in the appendix, A1 and A3.

Using the logo

PRIMARY / ON PAPER AND WHITE

REVERSE / ON INK

FLAT / UNDER 24 PX AND MERCH

ONE COLOUR / INK, WHITE OR VIOLET

APP ICON / MARK AT 60 PERCENT, ICON EDGE IS THE CLEAR SPACE

FAVICON / FLAT MARK, 16 PX MINIMUM

CLEAR SPACE / THE HEIGHT OF THE E

Lockup at least 24 px tall, about 92 px wide. Below that, use the mark alone.

MINIMUM SIZE / 24 PX TALL

✕ DON'T

Recolour the bubbles. The colours carry meaning.

✕ DON'T

Hey Diff

Split, capitalise or retype the wordmark.

✕ DON'T

Separate, flip or rotate the bubbles.

✕ DON'T

Add shadows, outlines, glows or bevels.

✕ DON'T

Stretch or squash. Scale proportionally.

✕ DON'T

Put the colour mark on mid tones. Use one colour.

Writing the name

The logo says heydiff. Text says HeyDiff. One word with two halves you can hear: Hey, the human opening, and Diff, the result.

IN THE LOGO

heydiff

heydiff, lowercase and drawn. Only ever as the supplied artwork, never typed.

IN TEXT

HeyDiff

the opening | the result

HeyDiff: one word, capital H, capital D, no space. In sentences, titles, buttons, mails and legal text.

SPECIAL CASES

heydiff.com	Domains and links stay lowercase.
@heydiff	Handles stay lowercase.
heydiff-kit, HEYDIFF_TOKEN	Code follows its own language rules.
HeyDiff for Mac	Products: HeyDiff for Mac, HeyDiff for Chrome.
HeyDiff's	Possessive with a plain apostrophe.

IN A SENTENCE

Pin it in HeyDiff and your agent picks it up.

HeyDiff keeps every request on record.

× DON'T **Heydiff**

× DON'T **Hey Diff**

× DON'T **HEYDIFF**

× DON'T **heyDiff**

× DON'T **Hey-Diff**

× DON'T **HD**

Gradients live in the mark

Three gradients, one per bubble, always in the same direction. Outside the mark they appear in brand artwork: a cropped mark, or a conversation composition. Never in the product.

Coral Back bubble. Speaks first.

- `#FFB46A` stop 0
- `#F25A82` stop 100
- `#FA7495` flat, when a gradient cannot print

```
linear-gradient(225deg, #FFB46A, #F25A82)
```

Direction: top right to bottom left. Never reversed, never another angle.

Blue Front bubble. Answers.

- `#22B7F2` stop 0
- `#226AE6` stop 100
- `#4584FE` flat, when a gradient cannot print

```
linear-gradient(135deg, #22B7F2, #226AE6)
```

Direction: top left to bottom right. Never reversed, never another angle.

Violet The overlap. Where they agree.

- `#9B5CF6` stop 0
- `#6E4EF0` stop 100
- `#6E4EF0` flat, when a gradient cannot print

```
linear-gradient(135deg, #9B5CF6, #6E4EF0)
```

Direction: top left to bottom right. Never reversed, never another angle.

WHERE GRADIENTS GO

In the mark and in artwork. Never in the interface.

Yes	The mark, at every size above 24 px
Yes	One cropped mark on brand artwork: social, slide covers, events, the website hero
Yes	Conversation compositions in marketing: the website, social, events, slides
Flat	Under 24 px, favicons, one-colour print, merch
No	Buttons, text, UI backgrounds, charts, status colours, borders

The product UI uses flat semantic colour only (page 16). A gradient on a control reads as decoration and competes with the one action that matters.

DECORATIVE CROPS

A big, cropped mark for covers and cards

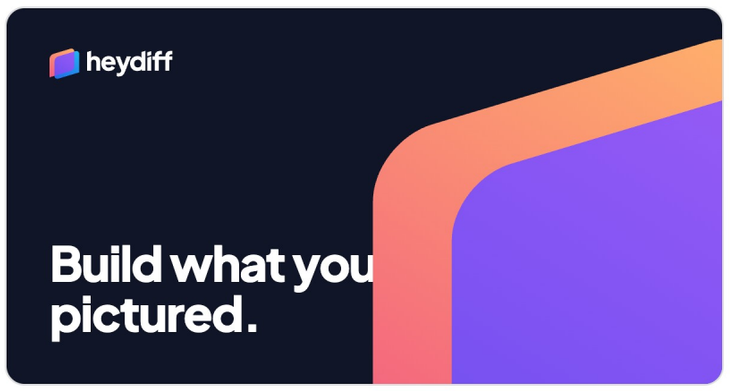

Social card
`1200 x 630, ink`

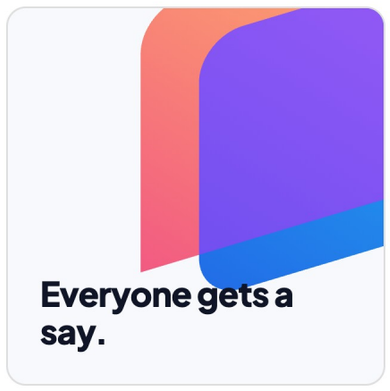

Square post
`1080 x 1080, paper`



Story
`1080 x 1920, ink`

- ✓ Crop from one corner or one edge. A third to half of the mark leaves the frame.
- ✓ One mark per format, on paper or ink only.
- ✓ Keep the overlap and at least one square corner visible, so it still reads as two bubbles.
- ✓ Text sits on the clean side. It never touches the artwork.

CONVERSATION COMPOSITIONS

More room for marketing, built from the same parts

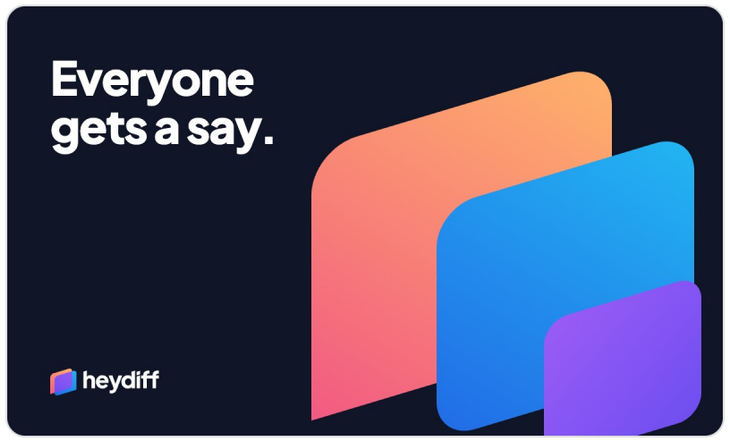

Overlapping bubbles
`Up to three, cropped at the edge`

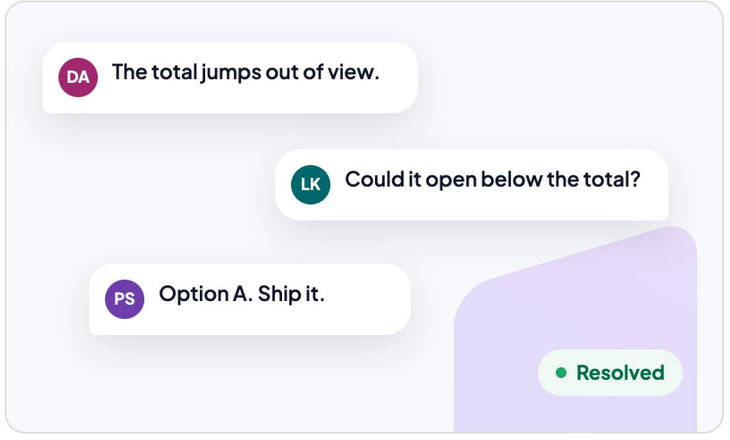

Conversation
`Real comments, real words`

- ✓ Marketing only: the website, social, events and slides. The product stays restrained.
- ✓ At most three bubbles, in the mark's shape and gradients. Where two overlap, the overlap may turn violet.
- ✓ Conversation cards use real product words and people's initials, never fake quotes or reviews.
- ✓ Text sits on ink, paper or a white card, never on a gradient.

✕ Don't

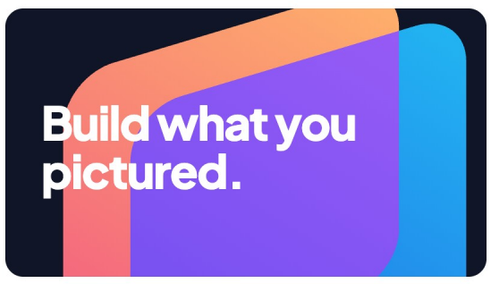

Put text over the artwork.

✕ Don't

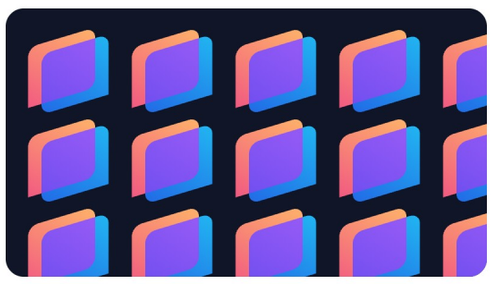

Tile the mark into a pattern.

✕ Don't

Recolour it, or drop the violet overlap.

✕ Don't

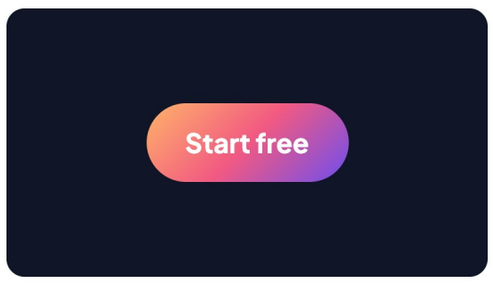

Use a brand gradient on a button or in the UI.

Colour palette

Three colours from the mark, plus ink, paper and one highlight. Most of a screen is paper and ink. Colour shows meaning: where a comment is, which revision, what was decided.

Rough share on a typical screen: paper 55 / ink 24 / violet 10 / blue 5 / coral 4 / peach 2

Decision Violet
#6E4EF0 / 110 78 240

Primary actions, links, focus, decisions.

Version Blue
#226AE6 / 34 106 230

Versions, environments, commits and the coding agent.

Feedback Coral
#E54A74 / 229 74 116

Pins, element outlines, open comments.

Highlight Peach
#FFB46A / 255 180 106

Highlighter, marketing accents. Never for text.

Ink
#101627 / 16 22 39

Text, wordmark, dark surfaces.

Paper
#F8F9FC / 248 249 252

Page background. Cards sit on white.

Scales

Dot = brand step / Ink text on 50 to 500, white text on 600 to 950 (Green: from 700)

	50	100	200	300	400	500	600	700	800	900	950
Violet	#F5F6FE	#EAEDFF	#D5D9FE	#BABEFE	#9A98FF	#8071FE	#6E4EF0 ●	#5A3CC3	#462C97	#331F6C	#1F1441
Blue	#F4F7FE	#E7EEFE	#CDDDFF	#A7C4FF	#77A4FE	#4584FE	#226AE6 ●	#1155BC	#044192	#002F69	#031D40
Coral	#FEF4F6	#FEE7EC	#FECDD8	#FFA7BB	#FA7495	#E54A74 ●	#C92C5A	#A42044	#7F1731	#5C1020	#390C12
Ink	#F8F9FC	#F0F2F7	#E3E6EE	#D0D4DE	#A5ABB8	#808695	#626979	#494F61	#333A4C	#1F2637	#101627 ●
Green	#F0F9F4	#D1F9E0	#B0EDC8	#89D9AB	#5ABD88	#1DA469	#038955	#026E43	#005533	#023C23	#012514
Amber	#FBF6EE	#FFEBCA	#FBD79C	#ECBB70	#D6993A	#BC7B07	#9F6400	#824F01	#663A00	#4A2801	#301700
Red	#FFF4F2	#FEE8E4	#FFD0C8	#FFAB9E	#FB7969	#E65142	#CA3429	#A4271E	#7F1C15	#5B140E	#380D09

Colour in the product

Semantic tokens for light and dark (Graphite), one colour per comment status, and fixed colours for pins, markup and diffs. Text pairs meet WCAG AA (4.5:1); control boundaries meet 3:1. The full token set is on page 16.

TOKEN	LIGHT	DARK
bg.canvas	#F8F9FC	#121214
bg.surface	#FFFFFF	#19191C
bg.subtle	#F0F2F7	#232327
border	#E3E6EE divider	#303036 divider
border.control	#808695 3.6	#6B6B74 3.3
text	#101627 18.0	#F7F7F8 16.4
text.muted	#494F61 8.2	#D2D2D7 11.6
text.subtle	#626979 5.5	#9C9CA5 6.4
action	#6E4EF0 5.2	#7357F6 4.8
action.hover	#6548DD 6.0	#6A50E2 5.4
link	#6E4EF0 5.2	#BABEFE 9.9
focus.ring	#8071FE	#9A98FF

Ratios: light text on white, dark text on surface #19191C. Buttons: Decision Violet in light, Violet 550 #7357F6 in dark, white text on both.

Comment statuses

- **Open** — Pinned and waiting. Also where skipped work returns.
- **Deciding** — A decision with options is open.
- **In Progress** — An agent or a person is working on it.
- **Revised** — A revision is in. Someone needs to check it.
- **Resolved** — A person checked it and closed it.

Agents act for a person

MK **Maya** via Claude Code
AGENT

JS **Jonas** via Codex
AGENT

An agent always works for someone. It shows that person's avatar with the agent's own app icon as a small badge, and the name reads "Maya via Claude Code". Agents read, ask back and build. Only people decide and resolve.

Pins and markup

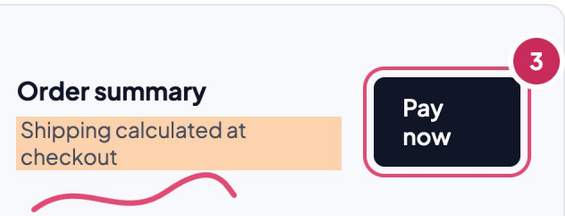

Pin: Coral 600, white number. Element outline and pen: Coral 500, 2 px. Highlighter: Peach at 55 percent.

Diffs

src/components/Checkout.tsx

```
88    <Button
89  - size="sm"
89  + size="lg"
90  - className="mt-8"
90  + className="mt-4 sticky"
```

Added: Green 50 line, Green 200 word. Removed: Red 50 line, Red 200 word. Markers in 700.

Typography

Two families. Plus Jakarta Sans for everything people read, JetBrains Mono for everything the machine wrote: versions, commits, paths and code. Both are free on Google Fonts.

PRIMARY

Aa

Plus Jakarta Sans

Regular Medium SemiBold Bold ExtraBold

Wordmark, headlines, interface and body copy. Geometric bones with open, friendly shapes. ExtraBold is for the wordmark and display sizes only.

ABCDEFGHIJKLMNOPQRSTUVWXYZ abcdefghijklmnopqrstuvwxyz
0123456789 äöüß &@#

MACHINE

a1f9c2e

JetBrains Mono

`staging / PR #482 / src/components/Checkout.tsx:88`

Versions, commits, branches, file paths, code and small uppercase labels. Engineers read it every day, so it signals that the detail is exact.

Display 64/68 800 -3.5%	**Point at it.**
H1 44/50 800 -3%	**Build what you pictured**
H2 32/40 700 -2%	**Every request keeps its trail**
H3 22/30 700 -1.5%	**Hand it to the agent**
Body L 18/28 400	Click the element that is wrong and say what should chang…
Body 16/24 400	The agent reads the open comments for its branch through MCP.
UI 14/20 500	Reopen comment
Caption 12/16 500	Resolved by Priya at 2:41 pm
Code 13/20 400 mono	`feature/checkout a1f9c2e`
Label 11/16 600 mono +6%	REVISION / STAGING

Sentence case everywhere, no all caps except mono labels. Tracking tightens as size grows. Body lines stay under 72 characters.

How HeyDiff talks

Calm, precise and productive, with a dry sense of humour. A tool for professionals, not a toy.

01

Calm

No exclamation marks, no hype, no urgency we don't have. State the problem, then the fix.

02

Precise

Name the element, the version and the person. "Pay now on staging", not "the button".

03

Productive

Every message ends in a next step or a clear state. If nothing is needed, say so.

04

Witty, lightly

One dry line where nothing is at stake. Never in errors, approvals or comments on someone's work.

MOMENT	WE WRITE	NOT
Handing off	Sent to Claude Code on feature/checkout. It will ask if anything is unclear.	~~Awesome! Your feedback is on its way to the AI!~~
Error	Couldn't capture the element. The page changed while you clicked. Try again.	~~Oops! Something went wrong.~~
Empty state	No open comments on this page. Comments people leave here show up as pins.	~~Nothing here yet! Start collaborating today!~~
Resolving	Resolved by Priya. Revision 1 is live on staging.	~~Great news! Your changes have been approved!~~
Agent asks back	Claude Code asks: should the button stick to the bottom on desktop too?	~~The AI needs your help!~~

Words we use

comment · pin · decision · revision · resolve, reopen · hand to the agent · before and after · trail

Words we avoid

magic · supercharge · 10× · seamless · AI-powered · the AI · just · oops

Call the agent by its name. "Just" makes someone's work sound small.

Name and line

HeyDiff in sentences, heydiff in the logo only. Never Heydiff, Hey Diff or HEYDIFF.

Build exactly what you pictured.

`Short form: Hey, make it yours.`

Icons, screenshots and pictures

HeyDiff shows the real product and a few plain icons. Coral marks what someone pointed at. Everything else stays paper and ink.

ICONS

Line icons that sit next to words

comment commentPlus decide rev session inbox search users

agent branch link eye check clock settings upload

16 20 24

16 in rows and chips, 20 in toolbars, 24 on their own.

- Lucide (ISC licence) first. Draw a missing icon on the same 24 grid, 2 px inside the edge.
- 2 px stroke, round caps and joins, no fill.
- Colour comes from the text next to it: text or text.muted. Status colour only inside a status chip.
- An icon alone needs a label: aria-label and a tooltip with the name and shortcut.
- Comment, the action, is the comment bubble with a plus (Lucide message-square-plus). A pin on the page is the numbered avatar pin (page 25), never a map pin.

PRODUCT SCREENSHOTS

Show the product, cropped to the point

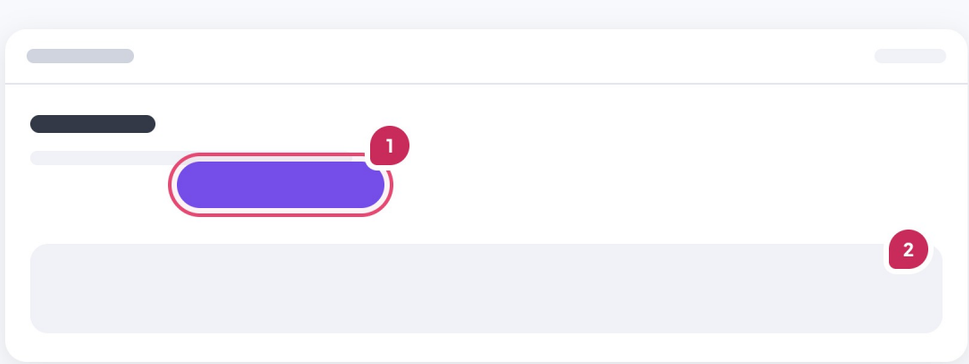

- Real HeyDiff screens with real-looking copy. No lorem ipsum, no fake numbers in headlines.
- Frame: 16 radius, 1 px border, e2 shadow in light, a 1 px edge in dark. No browser chrome.
- Crop to the part the sentence is about. One stage colour per page: paper or ink.
- Point with numbered pins and a 2 px coral outline, never with arrows or circles.

ANNOTATION

Coral marks the thing someone pointed at

3

Numbered pin
#C92C5A, white numeral, 5.3:1. Guides and the website.

DA

Author pin
In the product a pin shows who wrote it (page 25).

Element outline
2 px coral, 6 % wash. Follows the element's own corners.

button.pay

Label on coral
White with a coral border and dark text. Never white text on coral.

IMAGERY

No illustration system. The product is the picture.

- The product, the cropped mark (page 07), and type on paper or ink.
- People as avatars with initials, or real customers with their permission.
- Stock photos of people pointing at laptops.
- AI-generated people, 3D blobs, glowing orbs, robot mascots.
- Gradient washes behind text.

CHARTS

One colour for the point, grey for the rest

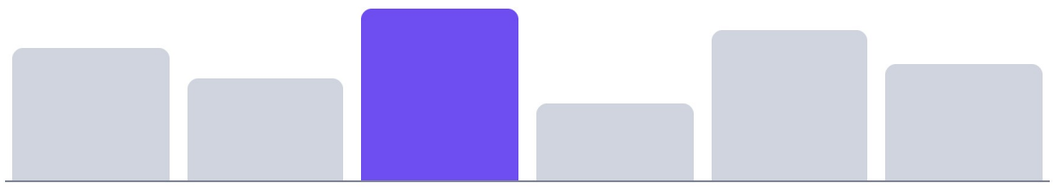

Violet marks the one value the sentence is about. Status colours appear only when the chart counts statuses, in the order Open, Deciding, In Progress, Revised, Resolved, and always with a legend in words.

In use

The system on a feedback thread and on the website.

staging.acme-shop.dev/checkout

3 open

Acme Shop

Checkout

Trail runner, size 43	EUR 129.00
Merino socks, 2 pairs	EUR 24.00
1 Shipping	EUR 4.90
2 **Total**	**EUR 157.90**

3 Pay now

Deciding #3

Pay now sits below the fold on mobile

staging / a1f9c2e / PR #482
Checkout.tsx:88

MK **Maya** 2:14 pm
On a 390 px screen you scroll to pay. Can it stick to the bottom?

JS **Jonas** 2:20 pm

A / Sticky bar
3 votes

B / Move up
1 vote

JS **Jonas** via Claude Code AGENT
Option A needs 72 px of bottom padding on the page. Should I add it?

Add an option

Decide: A

heydiff

Build what you pictured.

You bring the taste, your team brings the eye, your agent brings the speed. HeyDiff keeps them pulling in the same direction.

Add to Chrome

Start free

Social avatar
Mark on Ink, 60 percent of the circle.

3 **Extension button**
Flat mark, Coral 600 count.

Templates

Start every slide, post and email from these. They use only what earlier pages define: ink and paper, one cropped mark, Plus Jakarta Sans, one violet action.

Slides

1920 x 1080

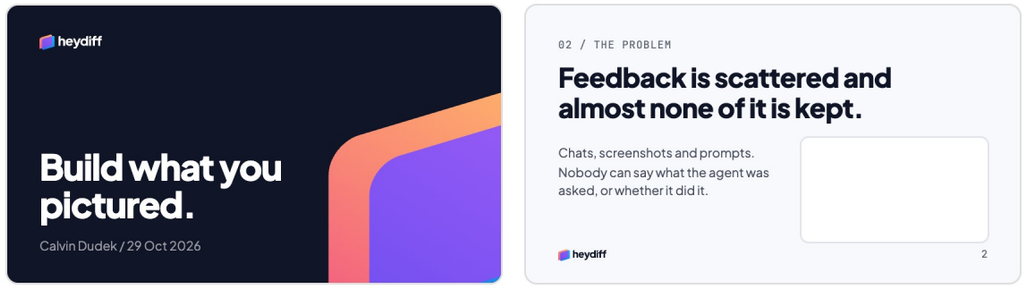

Margins	72 px all round, 12–column grid
Type	Title 96 / 800, heading 64 / 800, body 28 / 400, label 18 mono
Logo	Reverse on the title slide, 40 px high; 28 px bottom left on content slides
Colour	Title and closing slides ink with one cropped mark. Content slides paper.
Never	Agenda slides with icons per bullet, gradient fills, more than 30 words on a slide

Social card and link preview

1200 x 630

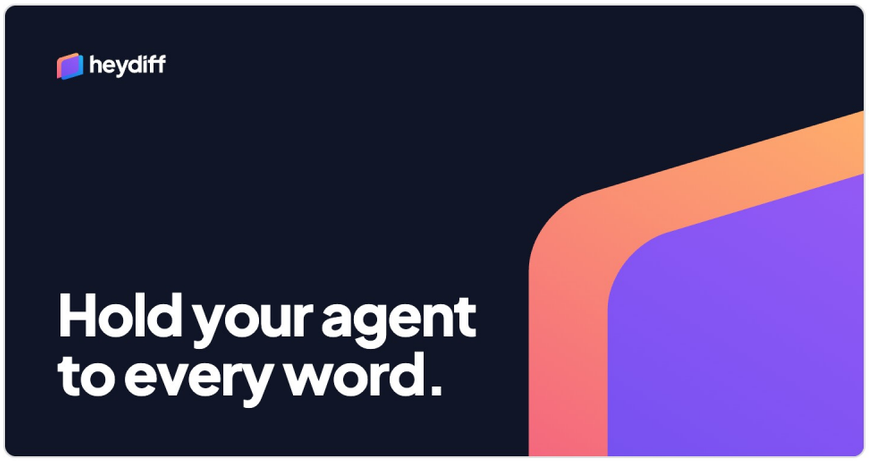

Margins	72 px left and top, 64 px bottom
Type	Headline 80 / 800, two lines max, 24 characters a line
Logo	Reverse, 40 px high, top left
Colour	Ink, or paper with the primary logo. One cropped mark, bottom right.

Feed post

1080 x 1350

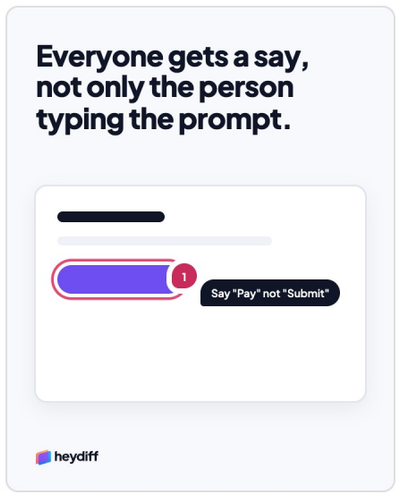

Margins	80 px
Type	Headline 72 / 800, up to 12 words
Picture	A product crop with one pin and its comment
Logo	Primary, 44 px, bottom left

Email

600 wide

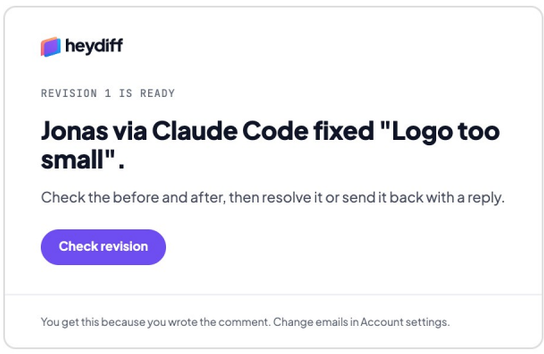

Width	600, 40 px side padding
Type	Heading 28 / 800, body 16 / 24, system font fallback
Logo	Primary, 24 px tall, top left
Action	One Filled button. The subject says what happened.
Footer	Why you got it, and where to stop it

Space, grid and layers

Every gap, size, corner and layer comes from a named step. The kit ships them as --ds-* tokens and lint fails a raw value, so screens stay consistent without anyone checking by eye.

SPACING / 4 PX BASE

Twelve steps, nothing in between

Pick the step by relationship: the closer two things belong, the smaller the gap. Website sections add 96 and 136 on top of this scale.

space-2	2	Focus ring gap
space-4	4	Icon to label, small chips
space-6	6	Status dot to its word
space-8	8	Buttons in a group
space-12	12	Field and button padding
space-16	16	Related items, phone gutter
space-20	20	Dense panel padding
space-24	24	Card padding, desktop gutter
space-32	32	Between groups
space-40	40	Sections in a panel
space-48	48	Page top and bottom
space-64	64	Website sections

DENSITY

Three densities, chosen by place, never by user setting

App

MK Coupon field ···

Controls	32
List rows	48
UI text	13 / 14
Hit area	32 min

Lists, tables, the thread, toolbars. The default.

Forms and settings

Checkout redesign

Controls	40
Field gap	16
Labels	13 / 600
Form width	560 max

Sign in, settings, dialogs with fields.

Touch

PS Reply

Controls	40 / 48
Rows	56
Body text	15 / 16
Hit area	44 min

Phones and any coarse pointer. Same layout, bigger targets.

BREAKPOINTS AND THE APP SHELL

The shell changes at 1100 and 640. Content never hides.

1100 and wider

Sidebar 248 px with labels and counts. Main column fluid.

640 to 1099

Sidebar becomes a 56 px rail. Icons keep their names as labels and tooltips. ⌘\ toggles it.

Under 640

Top bar 56 px: Menu, page title, one action. Menu opens the sidebar as a 300 px drawer.

TOKEN	FROM	COLUMNS	GUTTER	MARGIN
bp-phone	0 to 639	4	16	16
bp-compact	640	8	16	24
bp-medium	960	12	24	32
bp-wide	1280	12	24	32
bp-xwide	1680	12	24	auto
bp-ultrawide	2200	12	24	auto

MAX WIDTHS

`reading 720` `form 560` `panel 480` `dialog 640` `content 1920`

RADIUS

Round where you press, soft where you read

A nested corner is the outer radius minus the padding, never larger than the outer one.

999	Buttons, chips, switches, avatars, segmented controls
6	Checkboxes, keys, code and file tags
12	Fields, menus, popovers, tooltips, table frames
16	Cards, toasts, alerts, panels
24	Dialogs, drawers, sheets
32	Website sections and the product stage

ELEVATION

Four levels. Higher means it closes first.

Light mode uses shadow. Dark mode adds a 1 px edge in border, because shadows disappear on dark grey.

e0 / Border only
Page, cards, tables

e1 / 0 2 8
Menus, sticky headers

e2 / 0 6 20
Popovers, toasts

e3 / 0 16 40
Dialogs, drawers

LAYERS

Named layers, never a raw z-index

100	z-drag	A dragged option or element
90	z-toast	Above all, so Undo stays reachable
80	z-tooltip	Above menus, in dialogs too
70	z-menu	Menus, popovers, in dialogs too
60	z-dialog	One at a time
50	z-dialog-backdrop	Scrim right under the dialog
40	z-sheet	Drawers and bottom sheets
30	z-sheet-backdrop	Scrim right under the sheet
20	z-sticky	Table headers, top bar
0	z-content	Pages; outlines at 10

Every surface brings its own backdrop one step below it, so a scrim never covers the surface it belongs to. Esc closes the top surface first.

Semantic tokens, motion and targets

Screens use semantic names, never hex values. Base colour tokens are on page 09; this page adds statuses in both themes, interaction states, motion and target sizes. heydiff-kit and the web spec follow these values.

STATUS AND ROLE TOKENS / BOTH THEMES

Every status is a pair: tinted background, dark text, a dot, and always the word

Ratios are text on its own background, WCAG 2.2. All pairs pass 4.5:1 at 12 px. The dot only repeats what the word says, so colour is never the only signal.

LIGHT	TOKEN	BG	TEXT	RATIO
Open	status.open	FEF4F6	A42044	6.8
Deciding	status.deciding	F5F6FE	5A3CC3	6.8
In Progress	status.progress	F4F7FE	1155BC	6.4
Revised	status.revised	FBF6EE	824F01	6.4
Resolved	status.resolved	F0F9F4	026E43	5.9
Guest	role.guest	F0F2F7	494F61	7.3
>_ Agent	role.agent	101627	FFFFFF	18.0

DARK	TOKEN	BG	TEXT	RATIO
Open	status.open	3E222C	FFA7BB	7.8
Deciding	status.deciding	2D274C	BABEFE	7.9
In Progress	status.progress	1B2944	A7C4FF	8.3
Revised	status.revised	3A2D18	ECBB70	7.6
Resolved	status.resolved	1A322A	89D9AB	8.2
Guest	role.guest	2A2A2F	D2D2D7	9.5
>_ Agent	role.agent	F7F7F8	121214	17.5

CONTRAST FLOOR

What has to pass, light / dark

Checkout redesign | Checkout redesign

Body text and labels text 18.0 / 17.5, text.muted 8.2 / 11.6, text.subtle 5.5 / 6.4	4.5:1
Control boundaries border.control #808695 3.6 on white, #6B6B74 3.3 on #19191C	3:1
Focus ring, 2 px #8071FE 3.5 on canvas, #9A98FF 6.9 on surface	3:1
Icons that carry meaning Use text or text.muted, never text.disabled	3:1
Dividers between surfaces border #E3E6EE 1.3, #303036 1.3. Never the only edge of a control.	none
Disabled controls text.disabled 2.3 / 2.7. Keep them focusable and say why in a tooltip.	none

STATE LAYERS

One flat layer over the button. Size never changes.

REST	HOVER	FOCUS	PRESSED	DISABLED
	8 %, pointer only	10 % + ring, keyboard only	10 % + ripple	all at 38 %
Filled	Filled	Filled	Filled	Filled
Tonal	Tonal	Tonal	Tonal	Tonal
Outlined	Outlined	Outlined	Outlined	Outlined
Text	Text	Text	Text	Text
Danger	Danger	Danger	Danger	Danger

Filled and Danger take a black layer, every other type a layer in text. Rendered, Filled hover is #6548DD in light and #6A50E2 in dark: 6.0 and 5.4 with white text, so no separate hover colour is needed. Rows, menu items, chips and tabs use the same layers without the ripple, so lists stay calm.

TYPE	KIT KIND	HEROUI	USE
Filled	filled	primary	One per region, last in its row
Tonal	tonal	secondary	Every other standalone action
Outlined	outlined	outline	Two equal choices, option makers
Text	text	ghost	Actions in bars, rows and fields
Danger	danger	danger	Confirms what cannot be undone

MOTION

Short, eased out, small. Under reduced motion nothing moves.

Only opacity and transform animate. Exits are shorter than entrances. With reduced motion every distance is zero, so surfaces fade at 120 ms and the ripple becomes a flat 10 % layer.

motion-instant 120	State layers, tooltips, badges
motion-quick 160	Every exit, ripple fade, a row leaving
motion-standard 200	Menus, popovers, pins, toasts
motion-considered 240	Dialogs, panels, ripple growth



ease-standard
(0.2, 0, 0, 1)
Most motion, every exit.



ease-emphasised
(0.16, 1, 0.3, 1)
Surfaces that enter: dialogs, pins, toasts.

DISTANCE	DEFAULT	REDUCED
motion-shift	4 px	0
motion-shift-far	8 px	0
motion-scale-from	0.98	1
pin-scale-from	0.85	1
ripple-enabled	1	0

TARGETS

Big enough to hit

hit-min 32
Pointer. Icon buttons in rows and toolbars.

hit-touch 44
Touch. A 40 button gets a 44 hit area.

hit-touch-lg 48
Primary action on a phone.

The dashed line is the hit area. Two hit areas never overlap; keep 8 between 32 px targets.

NEVER ANIMATES

Text, numbers, status chips and screenshots change at once. No count-up, no shimmer on skeletons, no parallax, bounce or loops. Anything under the pointer moves 1:1. Route changes swap at once and focus moves to the heading.

How components are specified

Pages 19 to 27 describe each component family in the same six parts. Buttons and toasts come first, because every screen has them. The kit kind and HeroUI variant for each button type are on page 16.

THE SPEC FORMAT

Every component page answers the same six questions

01
Purpose
One sentence: the job it does and when to reach for it.

02
Anatomy
The parts, drawn in light and dark, at the size used in the app.

03
States
Rest, hover, focus, pressed, busy, disabled with reason, error.

04
Keyboard
Every key it takes. Nothing that is not in the shortcut list.

05
Small screens
What changes under 640 px and with a coarse pointer.

06
Use
When to use it, and the mistakes we have already made once.

Buttons

`Button, ButtonRow / kit`

Starts an action. Five types: Filled for the one next move in a region, Tonal for every other action, Outlined for two equal choices, Text inside bars and rows, Danger to confirm what cannot be undone.

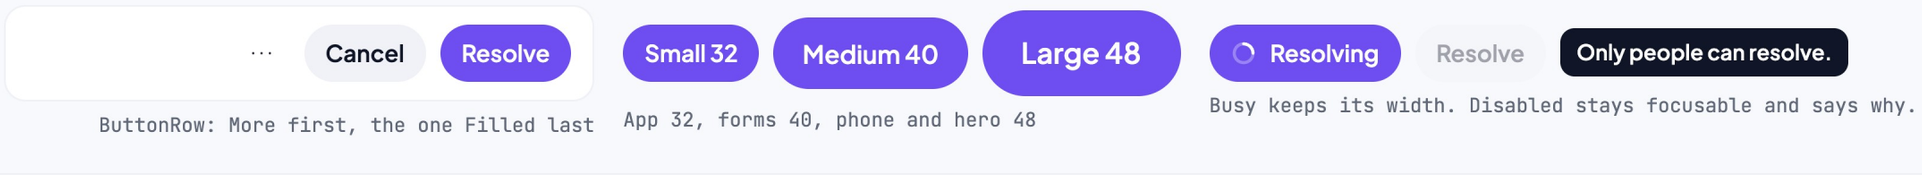

`ButtonRow: More first, the one Filled last`

`App 32, forms 40, phone and hero 48`

`Busy keeps its width. Disabled stays focusable and says why.`

STATES

- Rest, hover 8 %, focus ring, pressed ripple
- Busy: spinner replaces the icon, width kept, the wait is announced
- Disabled: 38 %, focusable, reason in a tooltip
- Danger: solid red, only in a confirm dialog

KEYBOARD

`Enter`	Press
`Space`	Press
`⌘` `Enter`	The dialog's Filled button
`Tab`	Next button, left to right

SMALL SCREENS

The Filled action moves to a bottom bar at 48 px and full width. Text buttons keep a 44 px hit area.

USE

- ✓ A verb that says what happens: Resolve, Reply, Share
- ✓ One Filled per region, last in its row, at the right
- ✗ Two Filled buttons side by side
- ✗ OK, Submit, Yes, or an icon with no label

Toasts

`Toast / kit`

Tells you what happened to something you cannot see, or gives you Undo. A toast is never the only record: the change itself is on the page or in the Inbox.

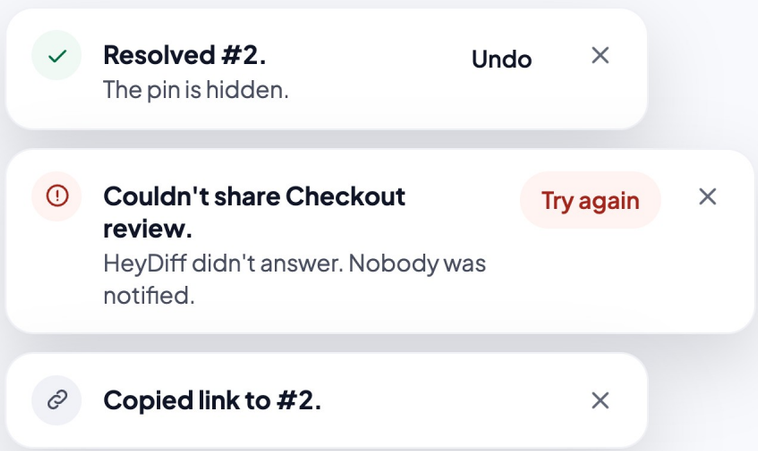

WHAT GOES WHERE

- **Toast:** your own action's result when it is off screen, or Undo
- **Inline at the item:** a failed write, with Try again and your text kept
- **Inbox:** agent revisions, mentions, decisions, other people's activity
- **Nowhere:** anything you can already see change

STATES

- Info: closes after 6 s
- With Undo: 8 s
- Failure: stays until closed
- Pauses on hover and focus; one at a time, a new one replaces the old

KEYBOARD

`⌘` `Z`	Undo the action of the toast on screen
`Tab`	Reaches the toast's button
`Esc`	Closes it when focused

SMALL SCREENS

Bottom, full width minus 16 px gutters, above the bottom bar. Same timing.

USE

- ✓ A sentence with a full stop: "Resolved #2."
- ✓ Name the object, so Undo is clear
- ✗ Agent events or someone else's comment
- ✗ "Success!" or a toast for what you can see

Components

HeroUI v3 with the HeyDiff theme. We keep HeroUI's components and behaviour and only change the tokens: accent, radius, font, and two extra colour roles for comments and revisions.

`--accent #6E4EF0` `--radius 0.5rem` `buttons and chips: pill` `fields: 12 px` `cards: 16 px, dialogs: 24 px` `font: Plus Jakarta Sans` `extra roles: --comment, --revision`

Buttons

`Button / ButtonGroup / ToggleButtonGroup / CloseButton`

VARIANTS — Filled · Tonal · Outlined · Text · Danger — `kit kind: filled, tonal, outlined, text, danger / HeroUI: primary, secondary, outline, ghost, danger`

SIZES — Small 32 · Medium 40 · Large 48 — Small 32 is the app default. Medium 40 for forms and dialogs, Large 48 on phones and the website.

WITH ICONS — + New comment · Export · Open pull request · Copy agent prompt · Comment

ICON ONLY — Always round. Every icon-only button has an aria-label.

STATES — Saving · Loading versions · Hover · Focus · Disabled — Loading keeps the width, swaps the icon for a spinner and blocks clicks. Pressed shows a ripple from the press point; with reduced motion, a flat 10 percent layer.

GROUPS — Day / Week / Month · Resolve · Before / Side by side / After — CloseButton, ghost and filled

Chips

`Chip / TagGroup`

Open · Deciding · In Progress · Revised · Resolved

New · Outline · MK Maya · `staging` × · Small

The five comment statuses from the product glossary, soft with a dot. Solid chips only for counts and New. Agent run states are on page 26.

Selection

`Checkbox / Switch / RadioGroup`

- [ ] Notify me
- [x] Pin to element
- [–] Select all
- [ ] Disabled

Hand off automatically — off

Show resolved — on

Agents can resolve — off
Off and locked. Only people resolve.

( ) Production (•) Staging ( ) Preview

Links, spinner, kbd

`Link / Spinner / Kbd`

Open pull request #482

View source on GitHub

Read the **hand-off rules** before your first agent run.

`staging / a1f9c2e / Checkout.tsx:88`

16, 24, 36 px. Accent by default, current text colour inside buttons.

`Ctrl` `K` opens search, `P` points at an element

Text fields

`TextField / SearchField`

Title

Pay now sits below the fold

Focused. Say what should change, not how.

Branch

feature/chekout

No branch with this name. Did you mean feature/checkout?

Search

Search comments, pages, people Ctrl K

Autocomplete

`Autocomplete / ComboBox`

Element

chec

STAGING / CHECKOUT

- **Chec**kout page /checkout
- Pay now button `Chec`kout.tsx:88
- **Chec**kbox, accept terms Terms.tsx:14

3 more on production

Toasts

`Toast`

Resolved #2. The pin is hidden. Undo for 8 seconds. — Undo

Couldn't share Checkout review. HeyDiff didn't answer. Nobody was notified. — Try again

Copied link to #2. The clipboard can't show it, so the toast does.

Bottom right, one at a time, only for a result off screen or to carry Undo. Closes after 6 s (8 s with Undo), pauses on hover or focus. Failures stay. Agent revisions and other people's activity go to the Inbox, never a toast.

Table

`Table / Pagination`

Filter · Resolve 1

	Comment	Status	Revision	Assignee	Updated ↓	
☐	Pay now sits below the fold /checkout / Pay now	Deciding	staging a1f9c2e	MK Maya	2:14 pm	···
☑	Wrong currency on invoices /billing / Invoice table	Revised	production 7c02d1f	JS Jonas	1:52 pm	···
☐	Empty state copy is too long /projects / Empty state	In Progress	preview PR #488	PP Priya via Codex	11:08 am	···
☐	Logo too small on mobile header / / Header	Resolved	production 9e41b0a	LW Lukas	Yesterday	···

1 selected / 4 of 57 — ‹ 1 2 3 4 … 15 ›

Avatars

`Avatar / AvatarGroup`

MK JS PR LW MK JS PR +3

24, 32, 40 px. Agents show the person they act for, with the agent's app icon as a badge.

Icons

`20 px / stroke 2 / round`

search · plus · check · close · filter · more

bell · trash · download · external · copy · alert

pointer · agent · comment · pull req · versions · settings

Lucide icons, 2 px stroke, as on page 12. Use one set, never emoji. Icons take the text colour.

Components

HeroUI v3 with the HeyDiff theme. We keep HeroUI's components and behaviour and only change the tokens: accent, radius, font, and two extra colour roles for comments and revisions.

`--accent #6E4EF0` `--radius 0.5rem` `buttons and chips: pill` `fields: 12 px` `cards: 16 px, dialogs: 24 px` `font: Plus Jakarta Sans` `extra roles: --comment, --revision`

Buttons

`Button / ButtonGroup / ToggleButtonGroup / CloseButton`

VARIANTS — Filled · Tonal · Outlined · Text · Danger — `kit kind: filled, tonal, outlined, text, danger / HeroUI: primary, secondary, outline, ghost, danger`

SIZES — Small 32 · Medium 40 · Large 48 — Small 32 is the app default. Medium 40 for forms and dialogs, Large 48 on phones and the website.

WITH ICONS — + New comment · Export · Open pull request · >_ Copy agent prompt · Comment

ICON ONLY — Always round. Every icon-only button has an aria-label.

STATES — Saving · Loading versions · Hover · Focus · Disabled — Loading keeps the width, swaps the icon for a spinner and blocks clicks. Pressed shows a ripple from the press point; with reduced motion, a flat 10 percent layer.

GROUPS — Day / Week / Month · Resolve · Before / Side by side / After — CloseButton, ghost and filled

Chips

`Chip / TagGroup`

Open · Deciding · In Progress · Revised · Resolved

New · Outline · MK Maya · staging × · Small

The five comment statuses from the product glossary, soft with a dot. Solid chips only for counts and New. Agent run states are on page 26.

Selection

`Checkbox / Switch / RadioGroup`

- [ ] Notify me
- [x] Pin to element
- [-] Select all
- [ ] Disabled

Hand off automatically — off

Show resolved — on

Agents can resolve — off and locked. Only people resolve.

(○) Production (●) Staging (○) Preview

Links, spinner, kbd

`Link / Spinner / Kbd`

Open pull request #482

View source on GitHub

Read the hand-off rules before your first agent run.

`staging / a1f9c2e / Checkout.tsx:88`

16, 24, 36 px. Accent by default, current text colour inside buttons.

`Ctrl` `K` opens search, `P` points at an element

Text fields

`TextField / SearchField`

Title

Pay now sits below the fold

Focused. Say what should change, not how.

Branch

feature/chekout

No branch with this name. Did you mean feature/checkout?

Search

Search comments, pages, people Ctrl K

Autocomplete

`Autocomplete / ComboBox`

Element

chec

STAGING / CHECKOUT

- **Chec**kout page /checkout
- Pay now button **Chec**kout.tsx:88
- **Chec**kbox, accept terms Terms.tsx:14
- 3 more on production

Toasts

`Toast`

Resolved #2. The pin is hidden. Undo for 8 seconds. — Undo

Couldn't share Checkout review. HeyDiff didn't answer. Nobody was notified. — Try again

Copied link to #2. The clipboard can't show it, so the toast does. — ×

Bottom right, one at a time, only for a result off screen or to carry Undo. Closes after 6 s (8 s with Undo), pauses on hover or focus. Failures stay. Agent revisions and other people's activity go to the Inbox, never a toast.

Table

`Table / Pagination`

Filter · Resolve 1

	Comment	Status	Revision	Assignee	Updated ↓	
☐	Pay now sits below the fold /checkout / Pay now	Deciding	staging a1f9c2e	MK Maya	2:14 pm	···
☑	Wrong currency on invoices /billing / Invoice table	Revised	production 7c02d1f	JS Jonas	1:52 pm	···
☐	Empty state copy is too long /projects / Empty state	In Progress	preview PR #488	PP >_ Priya via Codex	11:08 am	···
☐	Logo too small on mobile header / / Header	Resolved	production 9e41b0a	LW Lukas	Yesterday	···

1 selected / 4 of 57 — ‹ 1 2 3 4 … 15 ›

Avatars

`Avatar / AvatarGroup`

MK JS PR LW (>_) MK JS PR +3

24, 32, 40 px. Agents show the person they act for, with the agent's app icon as a badge.

Icons

`20 px / stroke 2 / round`

search · plus · check · close · filter · more

bell · trash · download · external · copy · alert

pointer · agent · comment · pull req · versions · settings

Lucide icons, 2 px stroke, as on page 12. Use one set, never emoji. Icons take the text colour.

Navigation

People move through HeyDiff with the sidebar, tabs, the command menu and the browser's own Back. Every place has a URL; filters and tabs are part of it.

Sidebar

AppShell / kit

Moves between the workspace's places. The same order everywhere: Search, Inbox, My Work, Comments, Decisions, Revisions, Sessions, then Settings at the bottom.

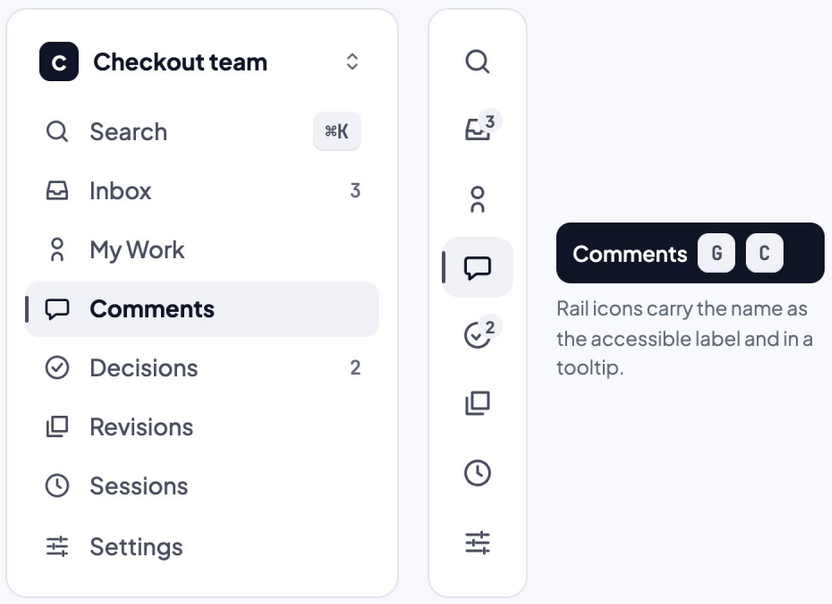

STATES

- Current page: neutral fill, bold label and a 2 px bar. Never colour alone
- Hover: the surface-2 fill
- Counts: Inbox and Decisions only
- Collapsed: 56 px rail, counts as a small number on the icon

KEYBOARD

G I	Inbox; G then M, C, D, R, S for the others
⌘ \	Collapse or expand
⌘ K	Search and commands

SMALL SCREENS

Under 640 px a 56 px top bar holds Menu, the page title and one action. Menu opens the sidebar as a 300 px drawer in the same order.

USE

- ✓ Places you return to, nouns as labels
- ✓ The same order on every screen
- ✗ Actions in the sidebar
- ✗ A violet active state

Tabs and segmented controls

Tabs, SegmentedControl / kit

Tabs switch between views of the same list and live in the URL. A segmented control switches how one thing is shown, like the compare mode.



STATES

- Chosen: surface-2 and bold, never violet
- Count in mono, muted
- Focus ring on the tab, not the panel

KEYBOARD

← →	Move between tabs
Home End	First, last
F	Focus the first filter chip

SMALL SCREENS

Tabs scroll sideways with a fade at the edge. A segmented control with more than two options becomes a Select.

USE

- ✓ Up to seven tabs, counts when they help decide
- ✓ Same labels as the statuses
- ✗ Tabs for actions or settings steps
- ✗ Hiding a tab when its count is 0

Page header and breadcrumbs

Breadcrumbs / kit

Says where you are and what you can do here. Breadcrumbs for objects inside objects, the title, the status, then at most three actions with the one Filled last.

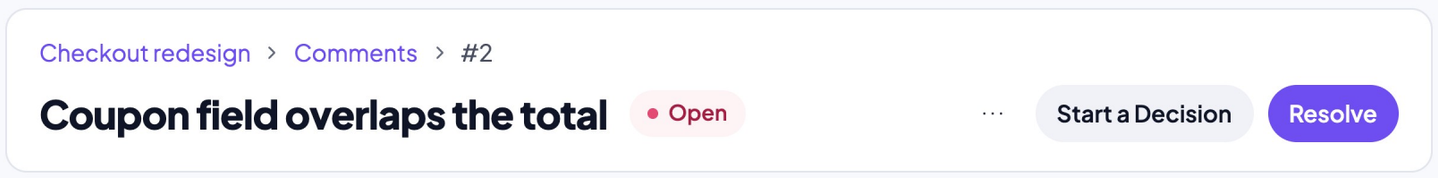

STATES

- Title wraps to two lines, then truncates with the full text in a tooltip
- Status chip always next to the title
- Actions keep their place when the status changes

KEYBOARD

Esc	Closes the top surface, then goes back to the list
J K	Next and previous item in the list you came from
Y	Copy the link

SMALL SCREENS

Breadcrumbs collapse to a Back link. Actions move into a bottom bar: the Filled one at full width, the rest in More.

USE

- ✓ Back is the browser's Back. Opening pushes, filters replace
- ✓ Links inside HeyDiff stay in the tab; links out open a new one
- ✗ A custom back button that forgets filters
- ✗ More than one Filled action

Overlays and menus

Six surfaces, each with one job. The layer order is on page 15, the motion on page 16.

WHICH SURFACE

Page
An object with a URL: a comment, a decision, a session.

Dialog
A short form or a confirm. Blocks the page.

Drawer
Detail beside a list, or the sidebar on a phone.

Popover
Filters and pickers, anchored to their control.

Menu
A list of actions behind More.

Tooltip
The name and key of a control. Never content.

Dialogs and sheets
Focus moves to the first field, or to Cancel in a confirm, and stays inside until closed.

Menus
Focus moves to the first item; arrows move, Esc returns focus to the trigger.

Popovers
Focus moves in only when the popover holds controls; otherwise it stays on the trigger.

Tooltips
Focus never moves. The tooltip describes its trigger and Esc hides it.

Closing anything returns focus to what opened it. Esc closes one level at a time, never two.

Dialogs

Modal, ConfirmDialog / kit

Asks for a few fields or a confirmation, then gets out of the way. 640 px wide at most, 24 radius, scrim behind. Ask first only for what cannot be undone; everything else acts at once with Undo.

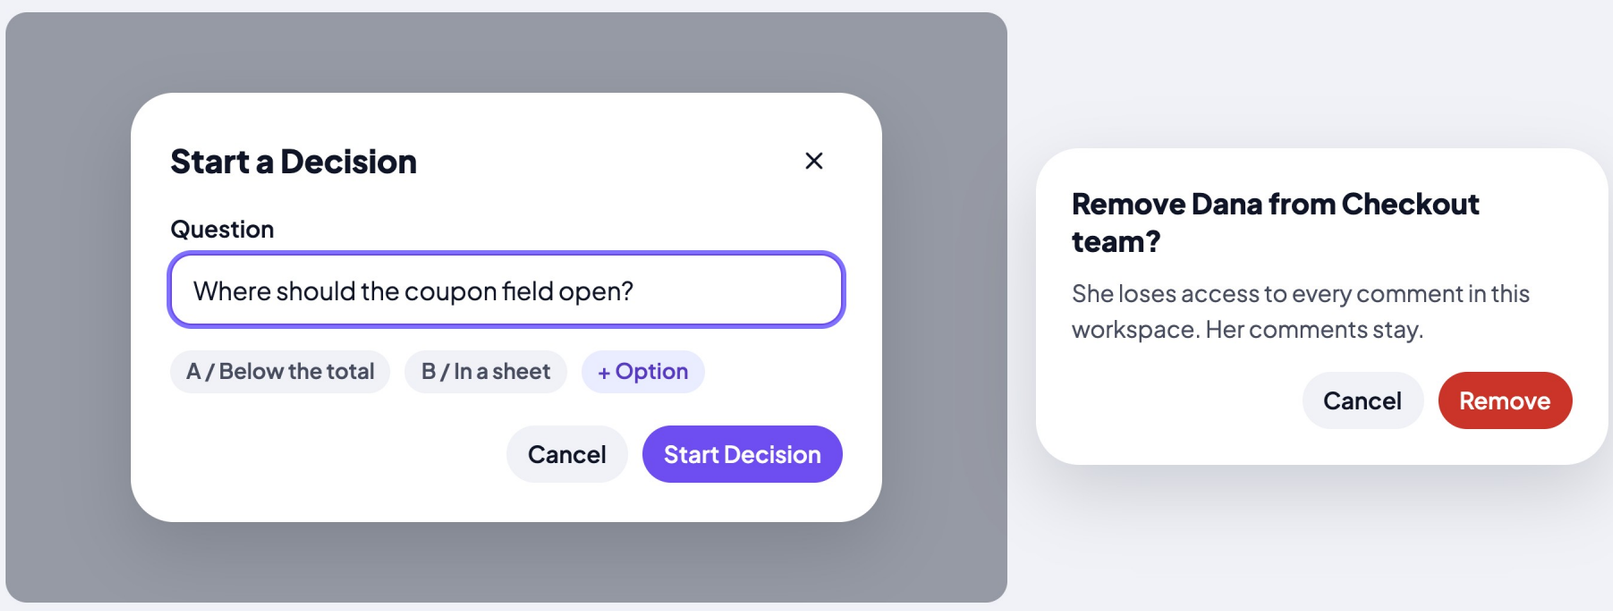

STATES

- Opens with focus on the first field, or on Cancel in a confirm
- Busy: the primary shows a spinner, fields stay
- Error: inline at the field; the dialog stays open
- Draft kept on Cancel for forms people type into

KEYBOARD

Esc	Cancel, the draft stays
⌘ Enter	The Filled button
Tab	Stays inside the dialog

SMALL SCREENS

Becomes a full-height sheet with the actions in a bottom bar. The title stays at the top.

USE

- ✓ One dialog at a time
- ✓ Danger plus a sentence of consequence for removals
- ✗ A dialog on top of a dialog
- ✗ Confirming what Undo could fix

Drawers and sheets

Drawer / kit

Shows detail next to the list it came from, so people keep their place. On a phone the same content rises as a bottom sheet.

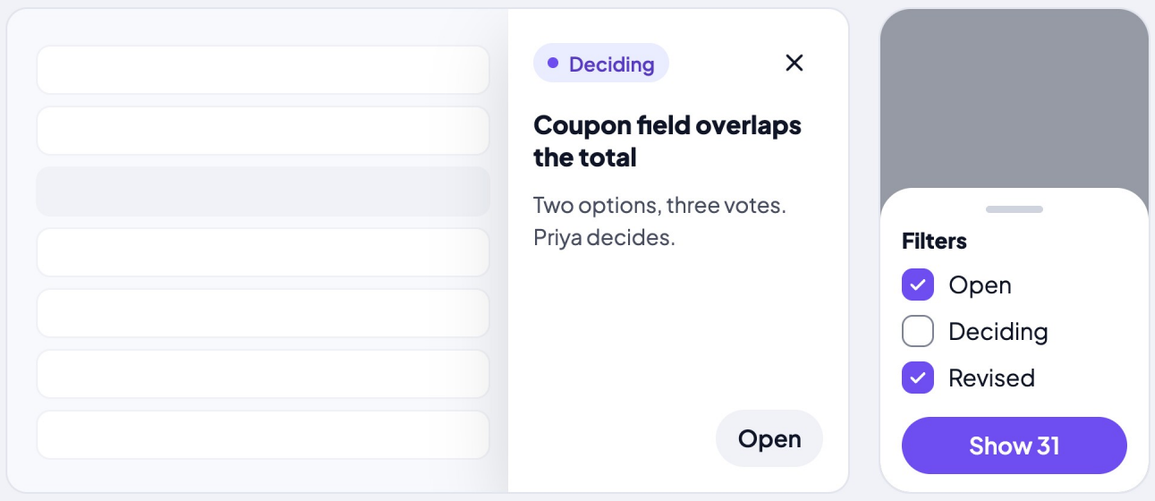

STATES

- Side drawer: 480 px max, e3, no scrim on desktop
- Bottom sheet: scrim, drag handle, snaps to content height
- The row that opened it stays highlighted

KEYBOARD

Esc	Close, focus back on the row
J K	Next or previous row, the drawer follows
↵	Open the full page

SMALL SCREENS

Side drawers become full-screen pages. Filters move into one bottom sheet with a Show button that says how many.

USE

- ✓ Peeking at a row without leaving the list
- ✓ Every filter on a phone, in one sheet
- ✗ Long forms in a drawer
- ✗ Two drawers at once

Menus, popovers and tooltips

Dropdown, Listbox, Tooltip / kit

Menus hold actions that do not earn a button. Popovers hold a filter or a picker. Tooltips name a control and its key, nothing more.

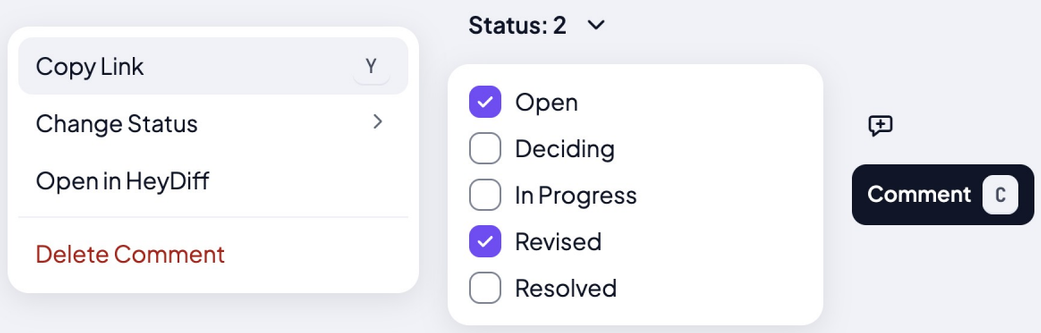

STATES

- Menu item: hover and focus use the same fill
- Destructive items last, in danger text, after a divider
- Submenus open on → and on hover after 150 ms
- Tooltip after 500 ms, at once on keyboard focus; focus stays on the trigger

KEYBOARD

↑ ↓	Move
↵ Space	Choose
Esc	Close, focus back on the trigger
A-Z	Jump to the first item that starts with the letter

SMALL SCREENS

Menus and popovers open as bottom sheets. Tooltips do not exist on touch: the label shows next to the icon instead.

USE

- ✓ Shortcuts shown at the right of menu items
- ✓ Popovers slide 4 px from their anchor
- ✗ Content or links inside a tooltip
- ✗ A menu with one item

Forms

Fields, choices and the rules for saving. Sizes come from the forms density on page 15; error wording follows Voice on page 11.

Text fields

`TextField, Textarea, NumberInput / kit`

Takes typed input. Label above, helper or error below, 40 px high in forms. The error says what happened and what to do, in that order.

Repository URL
`https://github.com/acm…`
Where the agent pushes.

Repository URL
`https://github.com/acm…`
Where the agent pushes.

Repository URL
`github.com/acme/web`
Start with https://. Nothing was saved.

Workspace ID
`ws_7Hq2`
Copy it for the API.

Seats
12
Only owners change seats.

Label above, 13 / 600 · Helper below, 12 · Optional says so; required does not · Error replaces the helper

STATES

- Default: 1 px border.control
- Focus: violet border and the 2 px focus ring
- Error: danger border, icon and message; text kept
- Read-only: dashed, copyable
- Disabled: says why below

KEYBOARD

Tab	Next field
↩	Submit a single-field form, or commit an inline edit
Esc	Revert an inline edit
⌘ Z	Undo inside the field

SMALL SCREENS

Fields go full width and 44 px high. The keyboard type matches the content: url, email, number.

USE

- ✓ Validate on blur and on submit
- ✓ Keep what people typed after every error
- ✗ Errors while someone is still typing
- ✗ Placeholder text as the label

Choices

`Select, Autocomplete, Checkbox, Radio, Switch, TagInput / kit`

Pick from known options. A switch applies at once; checkboxes and radios belong to a form with a Save button or to a filter.

Role
Member

Email me about
- [x] Revisions on my comments
- [x] Mentions
- [ ] Every new comment

Who can vote
- (•) Everyone in the thread
- ( ) Only the people I pick

Agents
- [x] Report revisions
- [ ] Resolve comments

Off and locked. Only people resolve.

Voters
PS Priya × DA Dana ×
Add people

STATES

- Checked: violet fill, white mark
- Switch locked: 38 %, reason below, still focusable
- Select open: a listbox with typeahead
- Tag input: ⌫ removes the last chip

KEYBOARD

Space	Toggle a checkbox or switch
↑ ↓	Move in a radio group or listbox
A-Z	Typeahead in a select
⌫	Remove the last chip

SMALL SCREENS

Selects open the system picker. Switches and checkboxes get the whole row as their hit area.

USE

- ✓ A switch for a setting that applies now
- ✓ Radios for 2 to 5 options, a Select above that
- ✗ A switch that needs Save
- ✗ A checkbox that starts an action

Form layout and saving

`Form patterns`

Forms are short and save in the most direct way the change allows. People never wonder whether something was saved.

General

Workspace name
Checkout team ✓ Saved

Default environment
Staging
Comments without an environment use this one.

Guests can comment
Applies at once.

- One column, 560 px max, 16 between fields, 32 between groups.
- Settings save on their own: a field on ↩ or blur with "Saved" for 2 s, a switch at once.
- New objects come through a dialog with Cancel and one Filled button at the bottom right.
- Submit stays enabled. Pressing it with errors moves focus to the first one.

STATES

- Saving: a quiet pending mark at the field
- Saved: "Saved" for 2 s, then gone
- Failed: the field keeps the text, error with Try again

KEYBOARD

↩	Commit a field
Esc	Revert the field
⌘ ↩	Submit a dialog form

SMALL SCREENS

One column already. Labels stay above. The submit button sits in a bottom bar, full width.

USE

- ✓ Group with a heading, not a box around every field
- ✓ Plain labels: what the field is, not an instruction
- ✗ Save buttons on settings that save on their own
- ✗ Two-column forms

Loading, empty and error states

Every screen is drawn in these states before it ships. Toasts are on page 18. The wording follows Voice on page 11.

Loading

`Spinner, StatusLine, skeletons / kit`

Shows that something is happening, only when the wait is long enough to notice. The thing you were looking at stays where it is.

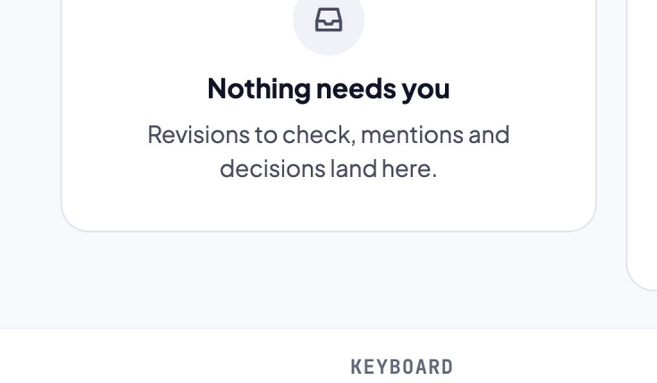

Skeleton after 400 ms. Static, no shimmer.

`0 to 400 ms`	Nothing. Most waits end here.
`400 ms`	A skeleton in the shape of what is coming.
`1 s`	Progress where you look: a busy button, a bar for uploads.
`10 s`	Say what is slow and keep the work: "Still uploading 2 of 5."

STATES

- Skeleton: grey shapes, no motion
- Busy button: spinner in place of the icon, width kept
- The wait is announced to screen readers
- Reduced motion: a static three-dot mark

KEYBOARD

`Tab`	A busy button stays focusable
`Esc`	Cancels a long upload when it can

SMALL SCREENS

Same timings. Skeletons match the phone layout, not the desktop one.

USE

- ✓ Waits over 1 s say what is happening
- ✓ Content that arrives keeps its place
- ✗ Full-page spinners
- ✗ Shimmer or looping motion

Empty states

`Empty pattern`

Says what this place is for once it fills up, what fills it, and offers at most one way to start.

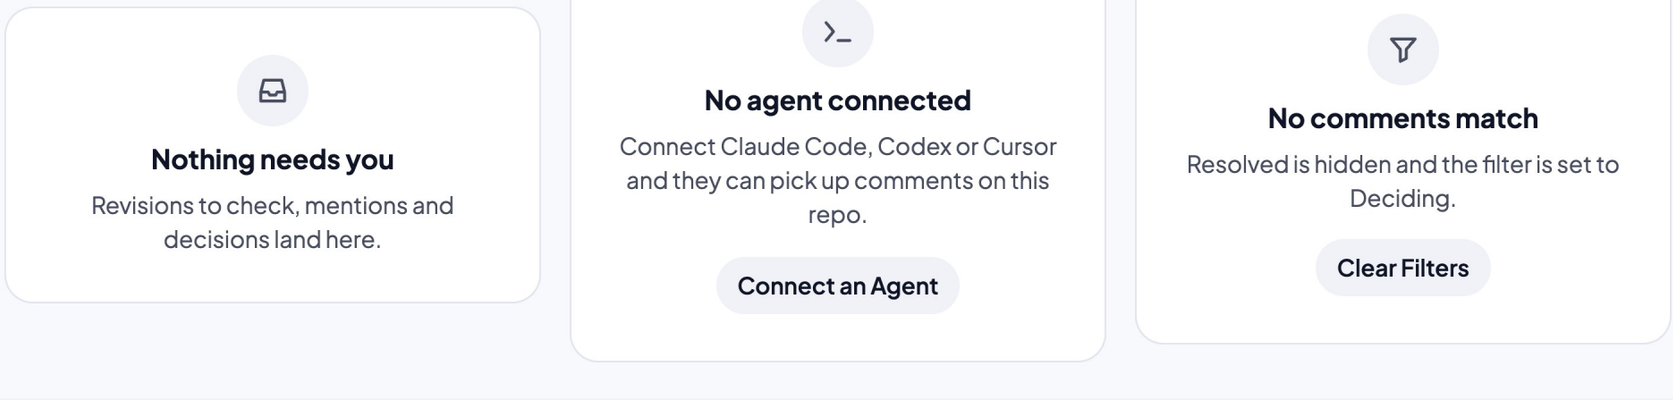

STATES

- First use: the outcome and what fills it
- Filtered to nothing: what is hiding them, and Clear Filters
- Done: say so plainly, no confetti

KEYBOARD

`Tab`	Reaches the one action

SMALL SCREENS

Same text, shorter lines. Actions that only work on a computer say "Works on a larger screen."

USE

- ✓ Describe the outcome, not the feature
- ✓ One action, Tonal
- ✗ Illustrations or jokes
- ✗ Two or more actions

Errors and offline

`Alert, banner, inline error / kit`

Errors appear at the thing that failed and read: what happened, what it means, what to do. Nothing typed is ever lost.

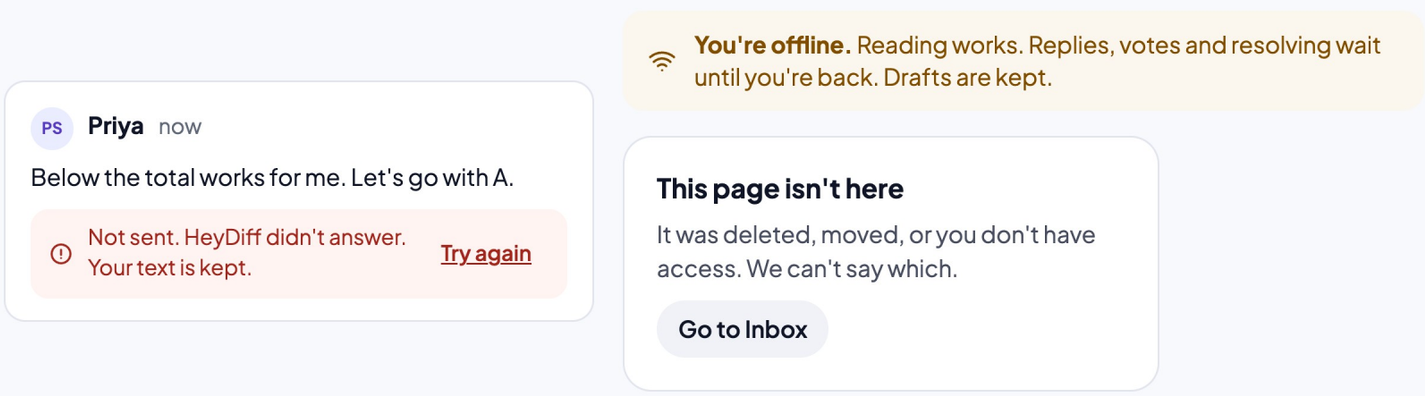

STATES

- Inline: at the item, stays until fixed
- Banner: one per page, for offline or a workspace problem
- Not found and no access look the same
- Writes are disabled with the reason while offline

KEYBOARD

`Tab`	Try again is reachable from the message
`⌘` `↩`	Retries a failed reply from the field

SMALL SCREENS

The banner sits under the top bar. Inline errors wrap, they never truncate.

USE

- ✓ Event, consequence, action: "Not sent. Your text is kept. Try again."
- ✓ Say who can fix it when it isn't the reader
- ✗ "Something went wrong" with no next step
- ✗ Error codes as the message

Tables, lists and filters

Inbox, My Work, Comments, Decisions, Revisions and Sessions are all lists. They share one row anatomy, one set of keys and one way to filter.

Tables and lists

Table / kit

Shows many items to scan, compare and act on. A row is a link to its item; checkboxes select for bulk actions; one column sorts at a time.

#	COMMENT	STATUS	AUTHOR	PAGE	UPDATED
#2	Coupon field overlaps the total	Deciding	LK Lukas	/checkout	12 min
#5	Pay button label says Submit	In Progress	PS Priya	/checkout	1 h
#7	Logo too small in the header	Revised	DA Dana	/	3 h
#9	Shipping options jump on load	Open	BN Ben	/checkout	Yesterday
#11	Footer links overlap on iPhone	Resolved	EV Eva	/	2 Oct

3 selected — Copy Links — Change Status — Resolve 3

STATES

- Row 48 px. Hover: fill, More appears; the same on focus
- Selected: a soft fill and a ticked box
- Sorted column: bold header and an arrow, aria-sort set
- Bulk bar replaces the footer while anything is selected

KEYBOARD

J K	Next, previous row
↵	Open the row
X	Select the row; Shift X a range
Y	Copy the row's link
.	Show new rows

SMALL SCREENS

Rows turn into two-line list items: title and status on top, author and age below. The checkbox column goes; long-press selects.

USE

- ✓ Age is the latest event, relative under 24 h
- ✓ New rows wait behind a "3 new" pill, nothing jumps
- ✗ Actions only on hover
- ✗ Pagination for live lists

Filters, sorting and grouping

Chip, Dropdown / kit

Narrows a list without losing it. Every filter, sort and grouping is in the URL, so Back, links and reloads keep them.

Status is **Open, Deciding** × — Page is **/checkout** × — + Filter — Clear — Group: Page — ⇵ Updated

3 new comments

`/checkout-team/comments?status=open,deciding&page=%2Fcheckout&group=page&sort=-updated`

STATES

- Active filter: a chip with its value and a remove button
- Empty result: says which filters hide everything, offers Clear Filters
- New rows: a pill, never a jump

KEYBOARD

F	Focus the first chip
← →	Move between chips
⌫	Remove the focused chip

SMALL SCREENS

One Filter button opens a bottom sheet with every filter and the grouping. The count on the button says how many are on.

USE

- ✓ "Is" for one value, "is any of" for several
- ✓ Defaults are not shown as chips
- ✗ Filters that reset on Back
- ✗ Hidden filters with no chip

Files, search and structure

Uploads, the command menu and the small parts that carry context. Pins, threads and decisions have their own pages, 25 to 27.

Uploads and attachments

`Drop zone, file chip`

Adds a mockup to a decision or an image to a comment. Paste and drop work everywhere a file is accepted; the button is there for people who do neither.

STATES

- Drag over: the zone fills and says what it accepts
- Uploading: progress bar and percent, the form stays usable
- Refused: the chip names what would work
- Failed upload: kept in the browser and retried by itself

KEYBOARD

⌘ V	Paste an image
Tab ↵	Choose File
⌫	Remove the focused chip

SMALL SCREENS

Choose File opens the photo picker. Drop zones shrink to a button with the same words.

USE

- ✓ Say the formats and the size limit before the upload
- ✓ Upload in the background, keep typing
- ✗ Blocking the form while a file uploads
- ✗ Losing the file after an error

Command menu

`CommandMenu, ShortcutsDialog / kit`

One place to find things and act in HeyDiff. ⌘K on Mac, Ctrl+K on Windows: search comments, decisions and sessions, jump to a page or run an action without clicking through menus.

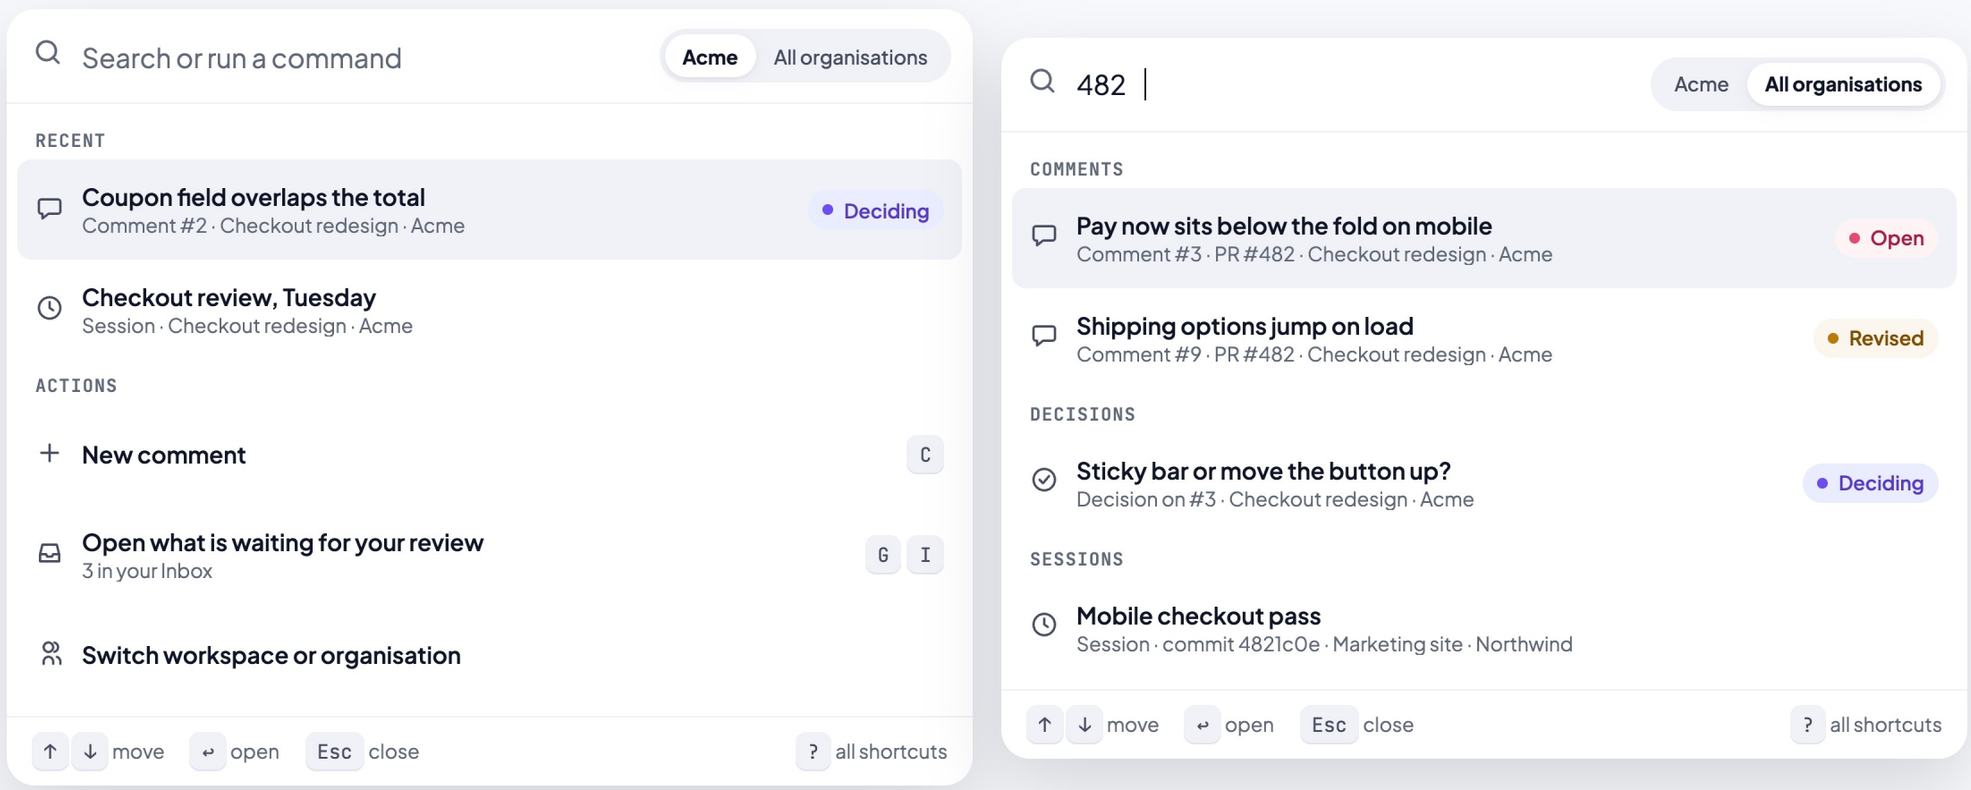

STATES

- Before typing: recent items and the useful actions for where you are
- Results grouped: Comments, Decisions, Sessions, Actions, Go to
- Every result shows its workspace, organisation and status
- Scope starts in the current organisation; one switch searches all you can access
- No match: "No results for 482" and an offer to search all organisations

KEYBOARD

⌘ K	Open from anywhere; Ctrl K on Windows
↑ ↓	Move
↵	Open the result or run the action
Esc	Close; focus goes back

SMALL SCREENS

Opens full screen with the keyboard up. Search in the top bar opens the same menu. Results drop the meta line to one line.

USE

- ✓ Finds by title, description, status, author, session, commit hash or PR number
- ✓ Lists only actions you are allowed to run; anything destructive opens a confirm dialog
- ✗ Actions that exist only here
- ✗ Single-key shortcuts while typing

Details, copy fields and people

`DescriptionList, CopyField, Avatar, Kbd / kit`

The small parts that carry context: where a comment was made, a value to copy, who is involved, which key to press.

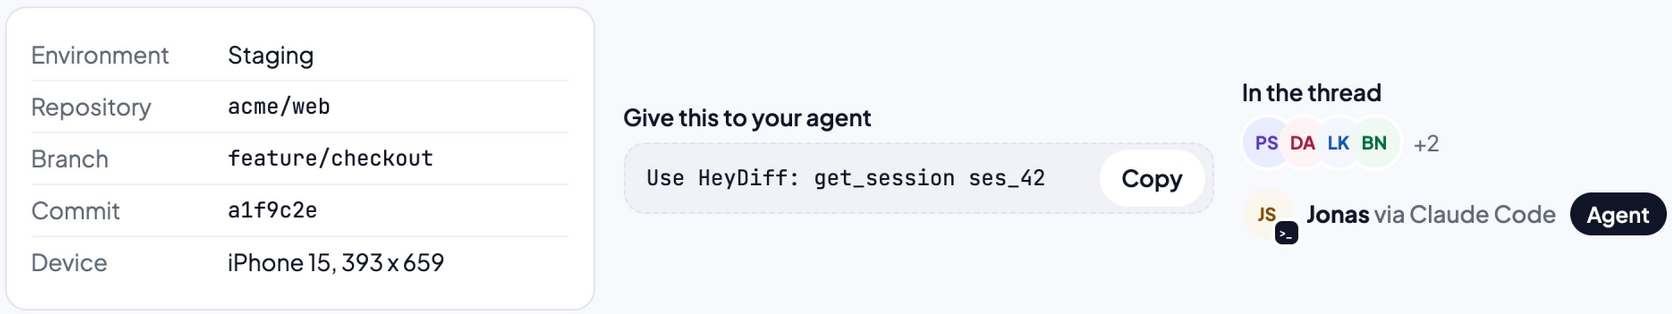

STATES

- Copy: the button says Copied for 2 s and a toast names what was copied
- Avatars: initials on a tinted fill; agents add the >_ badge and the Agent chip
- Long values truncate in the middle with the full value in a tooltip

KEYBOARD

Y	Copy the link of what you are looking at
Tab ↵	Copy from a copy field

SMALL SCREENS

Description lists stack label over value. Avatar stacks show three and a count.

USE

- ✓ Mono for code, IDs, branches and paths
- ✓ "{person} via {client}" whenever an agent did something
- ✗ An agent avatar without its person
- ✗ Icons in place of labels in a description list

KEYBOARD SHORTCUTS

Rules for every key the product binds

⌘K opens the command menu
Ctrl K on Windows. Everywhere, and nothing else. No action takes ⌘K for itself.

Single keys need focus in their place
J, K, R, Y, E, V and the rest work only inside their list, thread or card, and never in a text field.

People can turn them off or remap them
Account › Profile. Speech input and switch users can work without stray actions (WCAG 2.1.4).

One list, one source
Every shortcut shows in ? and the command menu, read from the same table. None takes a key the browser or system owns.

Pins, composer and thread

The parts only HeyDiff has. They follow the product spec (online-release-1, interaction.md) and the colour and motion rules on pages 09, 15 and 16.

Pins and outlines

Pin, SelectionOutline / extension

A pin marks a comment on the live page. A coral outline marks the element someone is pointing at. Both sit in their own layer and never change the page underneath.

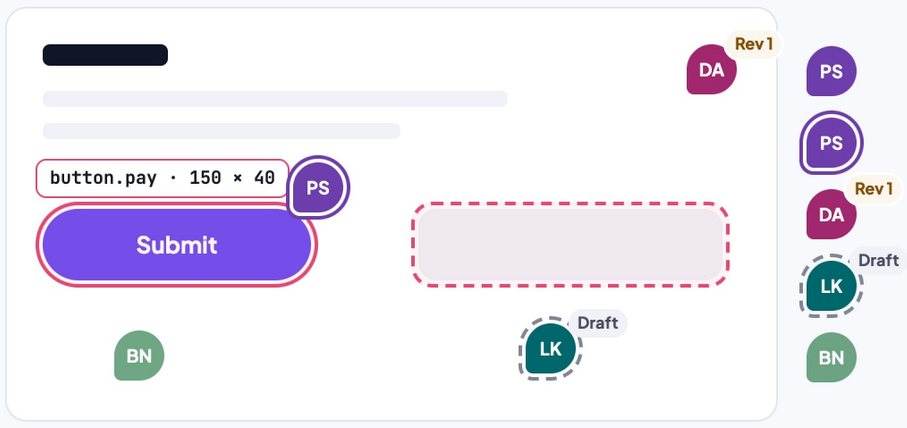

Pin: the author's colour and initials, tail at the element's top right

Open: a ring in the same colour while its popover is open

Rev 1: the agent reported a revision. Hover shows Before

Draft: only its author sees it. Click to keep writing

Earlier commit: 60 %, only with Show Earlier Commits on

STATES

- Hover: tooltip with name and first line
- Picking: 2 px coral outline, 6 % wash, tag chip outside the outline
- Another element hovered while one is picked: dashed outline
- Outlines stop 4 px short of a pin; pins sit on top

KEYBOARD

C	Start a comment: pick mode
↑ ↓	Parent or child element
← →	Previous or next sibling
Tab ↵	Reach pins in page order, open one
Esc	Leave pick mode

SMALL SCREENS

On a phone people read and reply, they don't place pins. Pins show at 24 px with a 44 px hit area.

USE

- ✓ Pin colours from the avatar set, the same in light and dark
- ✓ Labels on coral: white, coral border, dark text
- ✗ White text on coral
- ✗ Pins that cover the element they point at

Composer

Composer / extension

Writes the comment next to the element it is about. HeyDiff fills in where and when: the component, file and line, the commit, environment and device.

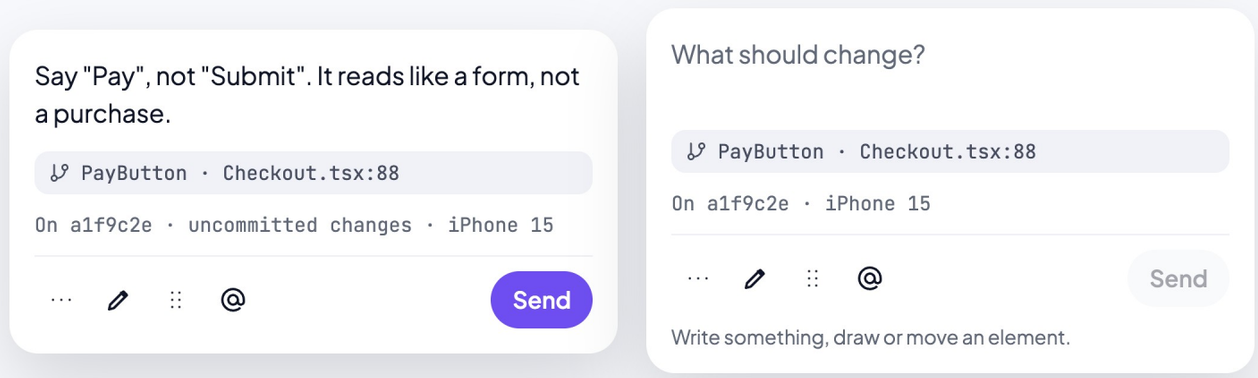

STATES

- Empty: Send disabled with the reason
- Sending: busy, label kept, announced
- Failed: a callout, text and drawing kept, Try again
- Parked on Esc Esc or ×: becomes a draft pin
- Docked at the bottom while drawing or moving

KEYBOARD

⌘ ↵	Send
@	Mention someone
Esc	Back to pick mode; again parks the draft
C	New comment, parks the open one

SMALL SCREENS

Phones get Reply only. "Comment on this page" says "Works on a larger screen."

USE

- ✓ Say what should change, not only what is wrong
- ✓ The element chip opens to Selector, DOM, Parent, Region, Module
- ✗ A title field: the first line is the title
- ✗ Losing a draft on reload

Pin popover and thread

PinPopover, Thread / web and extension

The conversation about one comment, on the page or on the Comment page. Entries in order, system lines for status changes, one reply field, and Resolve as the one Filled action.

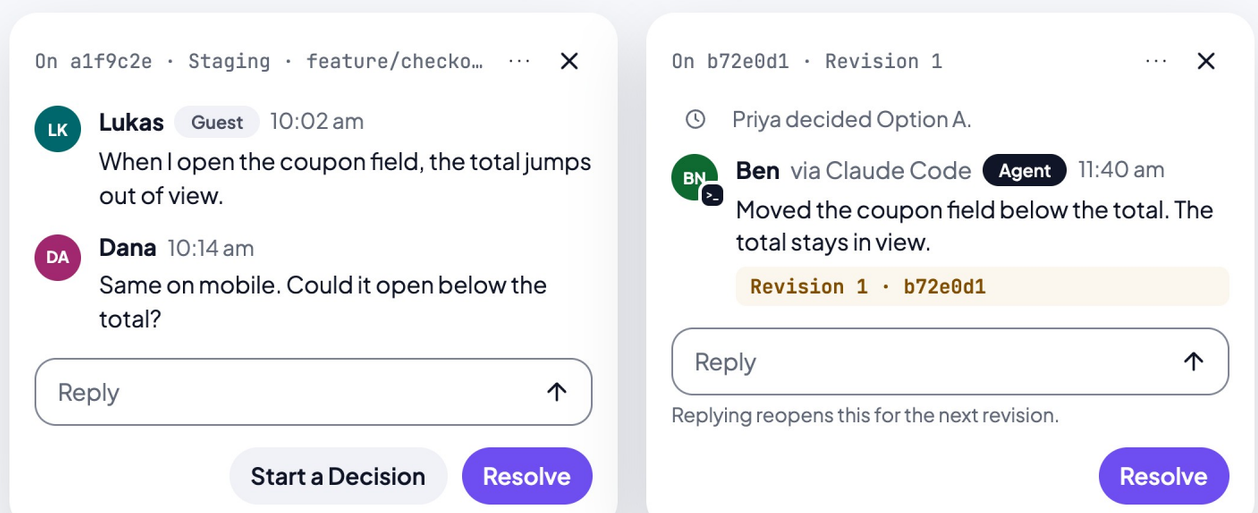

STATES

- Revised: context shows the revision; replying reopens it
- Guest: Resolve disabled, "Only members can resolve."
- Resolved: "Resolved by Priya · 2:41 pm" and Reopen in Resolve's place
- Agent working: "Ben via Claude Code is working on this."

KEYBOARD

↵	Open from a focused pin
R	Focus Reply
⌘ ↵	Send the reply
Y	Copy the link
Esc	Close

SMALL SCREENS

The popover becomes a full-screen sheet with Reply and Resolve in a bottom bar.

USE

- ✓ System lines for who changed what
- ✓ "{person} via {client}" and the Agent chip on agent entries
- ✗ Agents resolving or voting
- ✗ Moving the reading position when replies arrive

Context, decisions and agents

What travels with a comment, how a team settles it, and how an agent reports back. People decide and resolve; agents build and report.

Context block

`ContextLine, ElementChip / web and extension`

Everything an agent and a teammate need to find the spot: element, file and line, commit, environment and device, captured at Send. People read the line; agents read all of it.

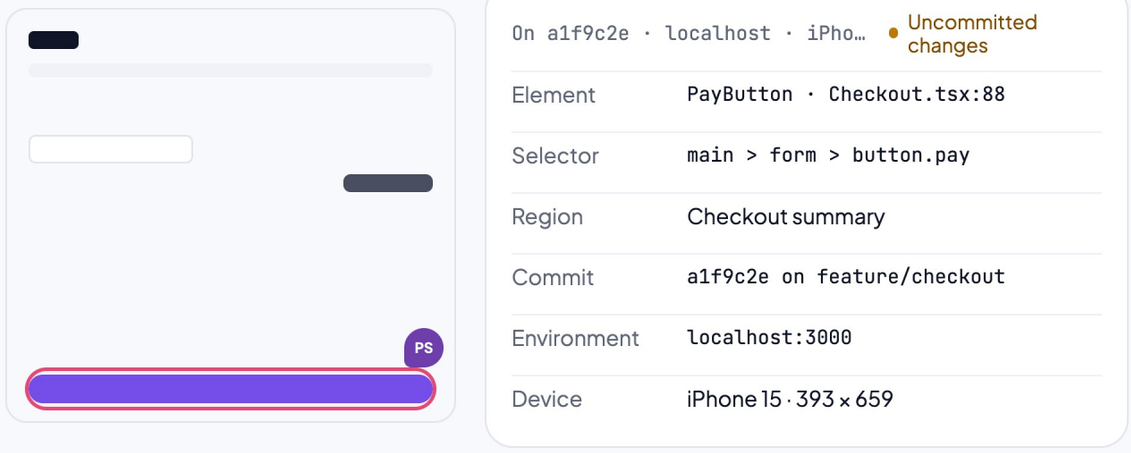

STATES

- Collapsed: one mono line "On {commit} · {environment} · {device}"
- Open: the full list, copyable
- Uncommitted changes: an amber dot and the words
- No source location: says so; agents search by selector and text

KEYBOARD

`↵`	Open the context from the line
`Y`	Copy the comment link
`Tab`	Each value is copyable

SMALL SCREENS

The line wraps to two lines. The list opens as a sheet.

USE

- ✓ Screenshots are evidence: never tinted, never dimmed in dark mode
- ✓ The same line on the pin popover, the Comment page and in MCP
- ✗ Paraphrasing where it happened
- ✗ Hiding the commit from people

Decision card

`DecisionCard, OptionCard / web`

Settles a disagreement with options side by side. People vote, a member decides, and the chosen option goes back to the comment for the agent to build.

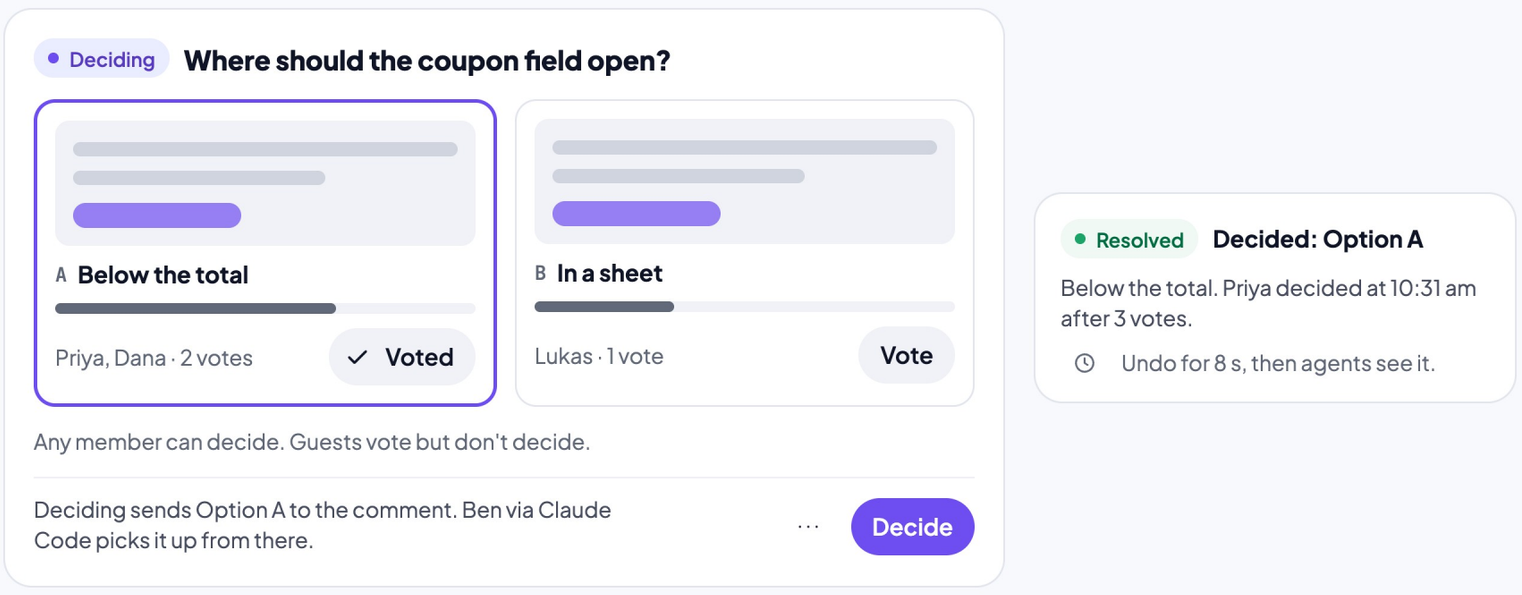

STATES

- Voting: tallies update live, "Voted" on your option
- Picked: a violet border on the option Decide will take
- Decided: a Decided card on the comment; the comment goes back to Open
- Cancelled: comment Open, a toast with Undo

KEYBOARD

`←` `→`	Move between options
`Space`	Pick
`V`	Vote
`Tab` `↵`	Decide from its button; no shortcut of its own

SMALL SCREENS

Options stack. Vote and Decide move into the bottom bar.

USE

- ✓ Two options at least; mockups, Figma links or text
- ✓ The sentence that says what Decide will do
- ✗ Agents voting or deciding
- ✗ Starting a decision while an agent is working

Agent run

`AgentEntry, RevisionEntry / web`

Shows what an agent is doing for a person, and what it changed. Agents claim, reply and report revisions through MCP; they never vote, decide or resolve.

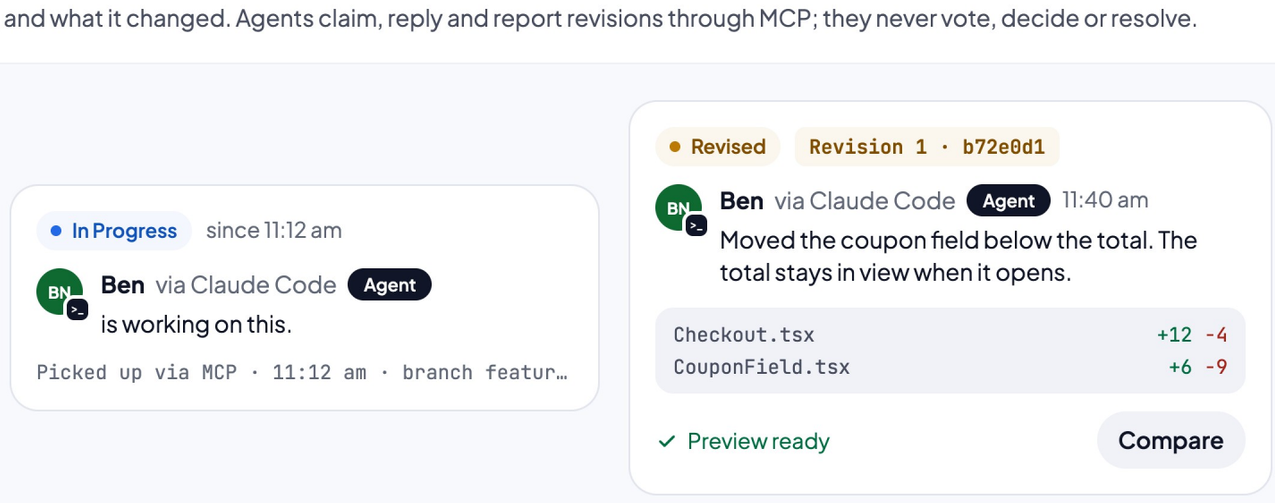

STATES

- In Progress: "{person} via {client} is working on this."
- Revised: Revision n with commit, summary, files, preview
- Stopped: "Ben via Claude Code stopped working on this." Status back to Open
- Refused: nothing in the UI; the agent gets the reason

KEYBOARD

`↵`	Open the revision
`Y`	Copy the commit

SMALL SCREENS

Files collapse to a count. Compare opens one image at a time.

USE

- ✓ The person first, the client second, the Agent chip always
- ✓ Revisions notify the author and the thread in the Inbox
- ✗ An agent with its own name or face
- ✗ A toast for an agent event

Before, after and the trail

`CompareView, ResolvedTrail / web`

Lets a person judge the change. HeyDiff tracks what the agent reported; only a person says it is right. Before and After show the same region at the same scale; the trail on a resolved comment shows every step from the first comment to Resolved.

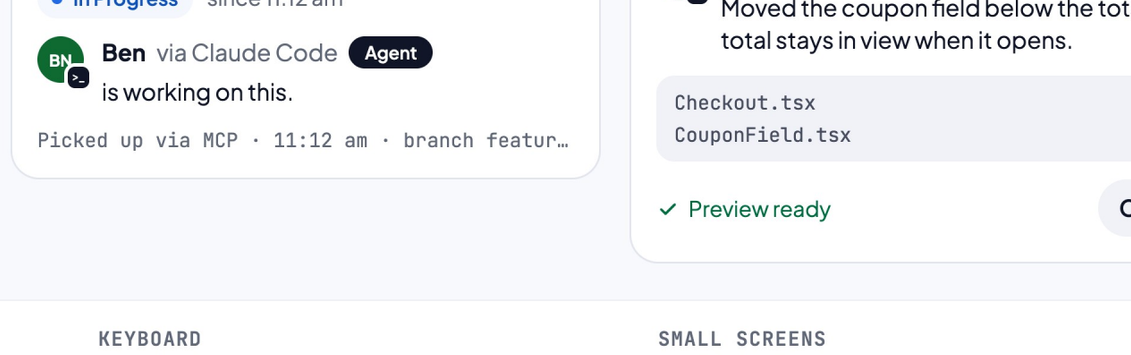

STATES

- Side by Side or Slider; the slider follows the pointer 1:1
- Two or more revisions: a revision picker
- Trail: Show Trail on a resolved row, opens with the panel motion
- Revised by hand: "marked by {name}"

KEYBOARD

`+` `-` `0`	Zoom in, out, reset
`←` `→`	Move the slider
`Tab` `↵`	Show or hide the trail

SMALL SCREENS

One image at a time, labelled "After · Revision 1". The trail stacks.

USE

- ✓ Same region, same scale, every time
- ✓ Keep Before and After in every status
- ✗ Cropping After to make it look better
- ✗ Hiding who made the revision

Code, selections and diffs

People point at elements; agents need code. These blocks show what was picked, where it lives in the repo, and what changed, in a form both can read.

Selection block

`ElementChip, SelectionList / extension and web`

Turns what someone pointed at into code an agent can find: one row per picked element, numbered like the badges on the page, each opening to its selector, DOM path, parent and source.

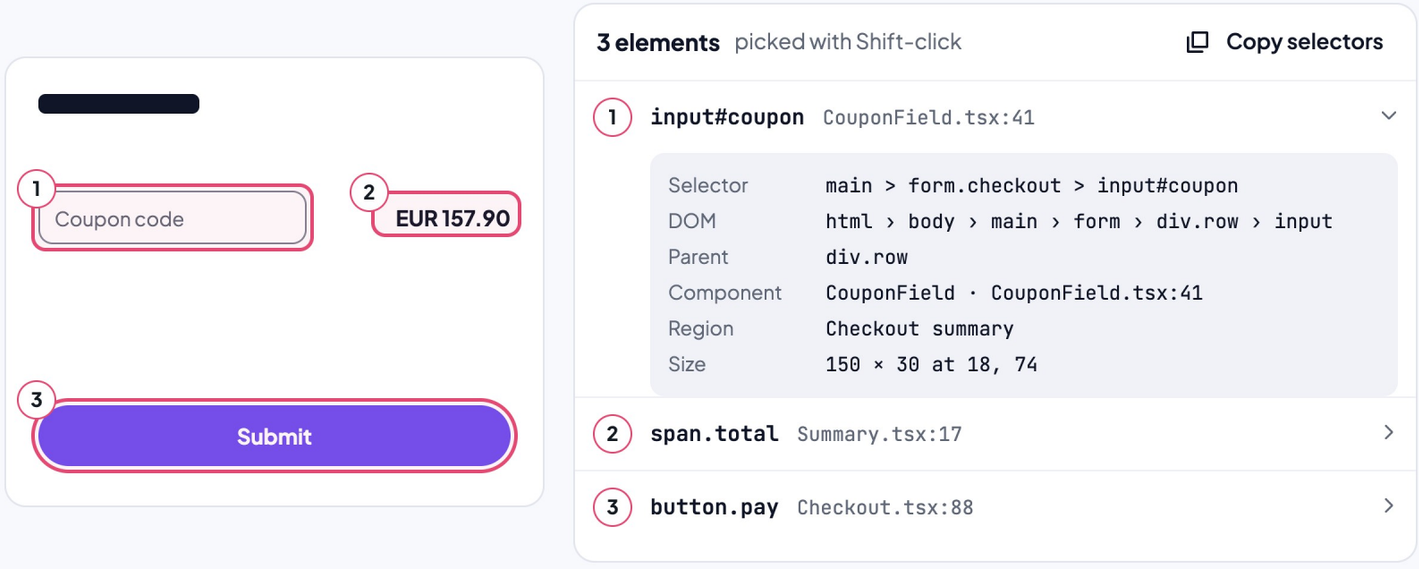

STATES

- One element: a single chip in the composer, "PayButton · Checkout.tsx:88"
- Several: a numbered list; numbers match the badges on the page
- Open row: Selector, DOM, Parent, Component, Region, Size
- No source: "No source location", the selector still shows

KEYBOARD

↑ ↓	Move between rows
↩	Open or close a row
Shift ↩	Add the focused element in pick mode

SMALL SCREENS

Rows show the selector only; source moves into the open row. Picking needs a larger screen.

USE

- ✓ The same numbers on the page, in the list and in what the agent receives
- ✓ Long selectors truncate in the middle, full value in a tooltip
- ✗ Coloured syntax inside chips
- ✗ Renumbering when one element is removed

Code block

`CodeBlock, InlineCode / kit`

Shows source exactly as the agent or the repo has it: the file, the lines, and the lines that matter. Code is always shown as text, never run or rendered.

INLINE CODE

Mono 12.5 on surface-2, 6 px radius, no colour. For selectors, props, file names and commits inside a sentence.

STATES

- Highlighted lines: a coral bar and a 6 % wash, for the element someone picked
- Long files: 12 lines around the match, then "Show all"
- Long lines: scroll sideways; Wrap turns on wrapping and remembers it
- Copy: says Copied for 2 s; line numbers are never copied

KEYBOARD

Tab	Reaches Wrap and Copy
⌘ C	Copies a selected range
⌘ A	Selects the block, not the page

SMALL SCREENS

Full width with 16 px gutters. Wrap is on by default under 640 px, and line numbers shrink to 32 px.

USE

- ✓ Mono 12.5 / 20, file name and language in the header
- ✓ Syntax colours from the token table below
- ✗ Code as a screenshot
- ✗ Colour as the only sign of a change

Diff

`DiffView / web`

Shows what changed in a revision, and what a reviewer suggested by moving or aligning elements. Signs and words carry the meaning; colour only repeats it.

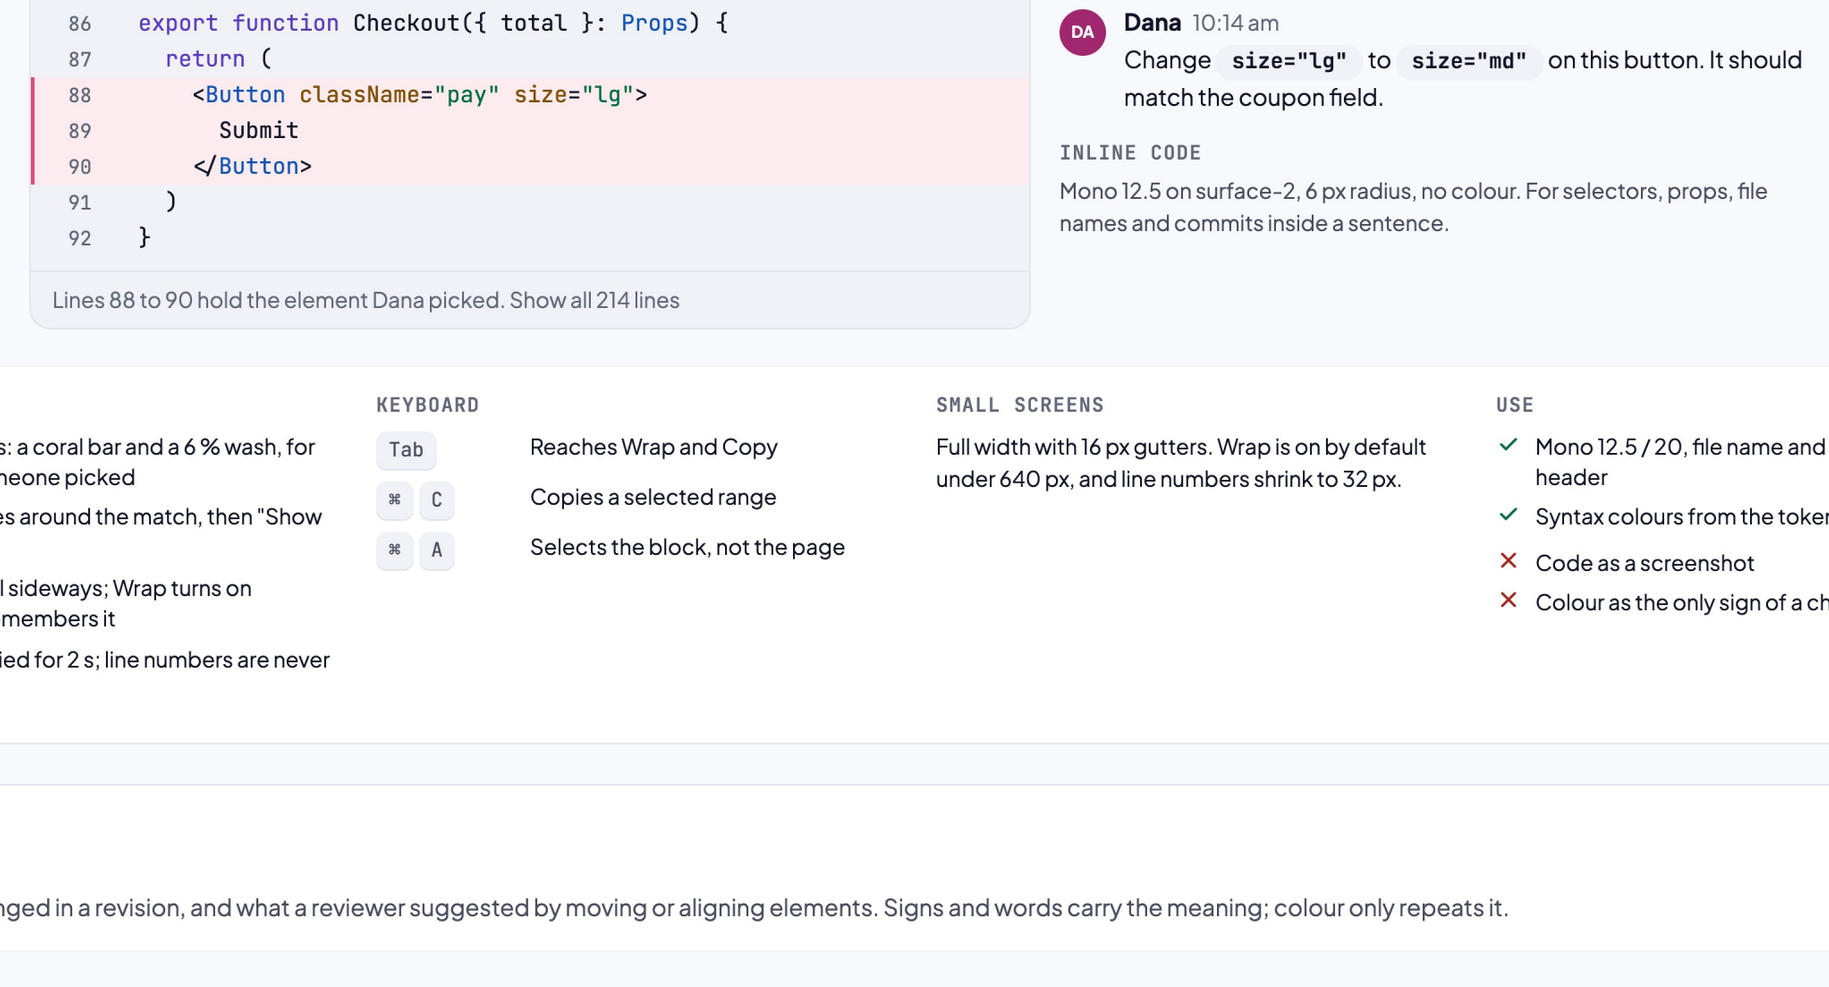

STATES

- Added: + sign, green wash; changed words a stronger green
- Removed: – sign, red wash; screen readers hear "added" and "removed"
- Unchanged runs fold to "14 unchanged lines"
- Suggested CSS: labelled "not applied", never looks like a commit

KEYBOARD

↩	Unfold unchanged lines
J K	Next and previous change
Tab	Reaches Copy and the file name

SMALL SCREENS

Unified view only. Words wrap; signs stay in their column.

USE

- ✓ One file per block, with its +/– count
- ✓ The revision and who made it under the block
- ✗ Side-by-side diffs under 960 px
- ✗ Red and green without the signs

`SYNTAX TOKENS / BOTH THEMES`

Seven colours, all above 4.5:1 on the code background

They reuse the status text colours, so the palette stays small. Inside code they mean syntax, not status.

LIGHT, ON #F0F2F7

code.plain	total	#101627	16.1
code.keyword	return	#5A3CC3	6.5
code.tag	Button	#1155BC	6.1
code.attr	className	#824F01	6.1
code.string	"pay"	#026E43	5.7
code.number	16px	#A42044	6.5
code.comment	// picked by Dana	#626979	4.9
code.lineno	88	#626979	4.9

DARK, ON #121214

code.plain	total	#F7F7F8	17.5
code.keyword	return	#BABEFE	10.6
code.tag	Button	#A7C4FF	10.7
code.attr	className	#ECBB70	10.6
code.string	"pay"	#89D9AB	11.2
code.number	16px	#FFA7BB	10.2
code.comment	// picked by Dana	#9C9CA5	6.9
code.lineno	88	#8A8A93	5.5

Giving feedback, step by step

How a comment is made in the browser extension, on the running app. Six steps, most of them a single key. The components are on pages 25 to 27.

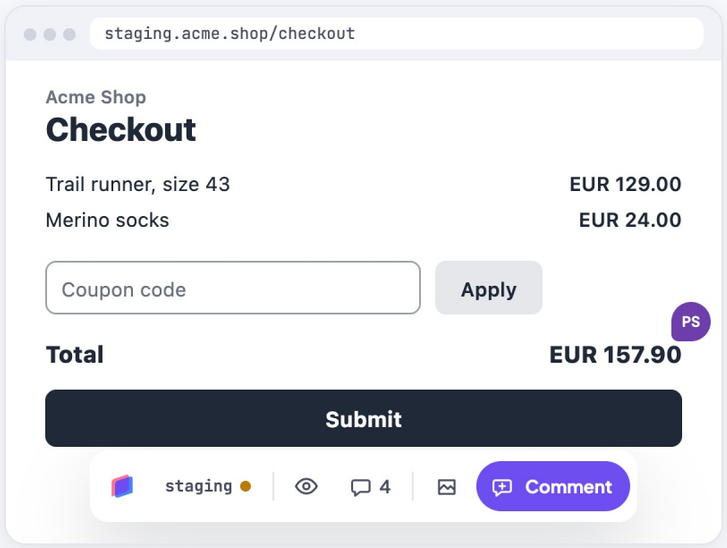

01 Open the toolbar

At the bottom of any page of the running app: where it comes from, whose pins show, the device, and Comment.

`C` start a comment `⌘` `⇧` `K` hide or show

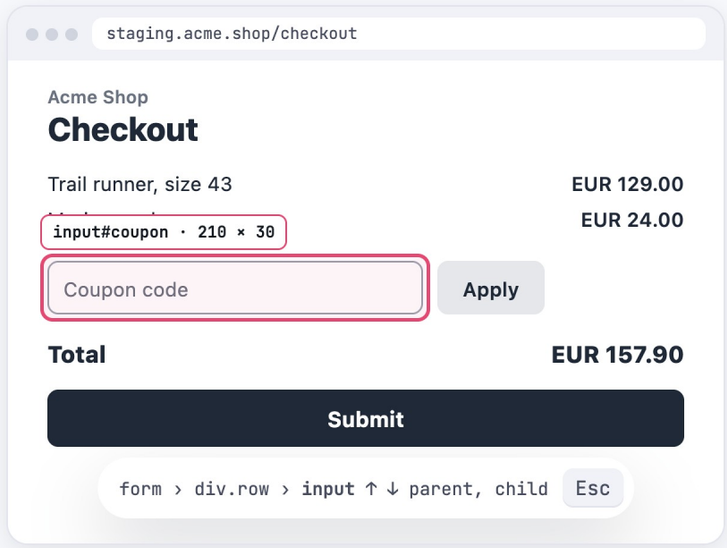

02 Point at the element

A coral outline follows the pointer. The tag says what it is; the bar shows where it sits.

`↑` `↓` parent, child `←` `→` siblings

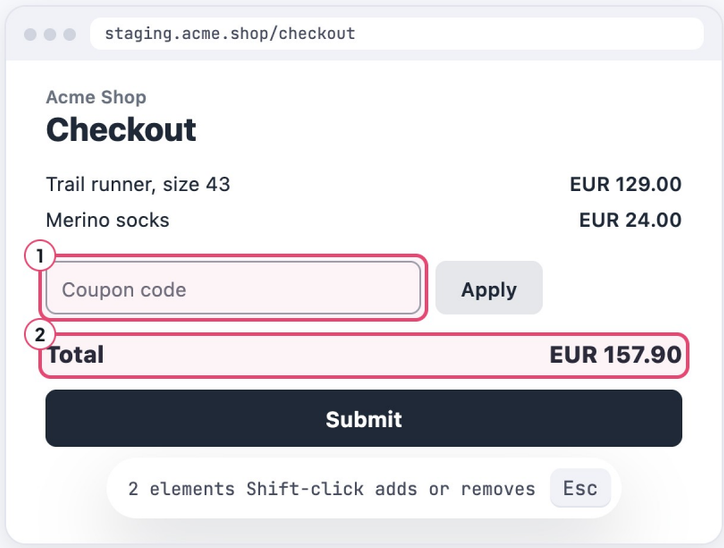

03 Pick several, if it is about more than one

Shift-click adds an element. Numbers match what the agent receives.

`Shift` ↵ add or remove ↵ write

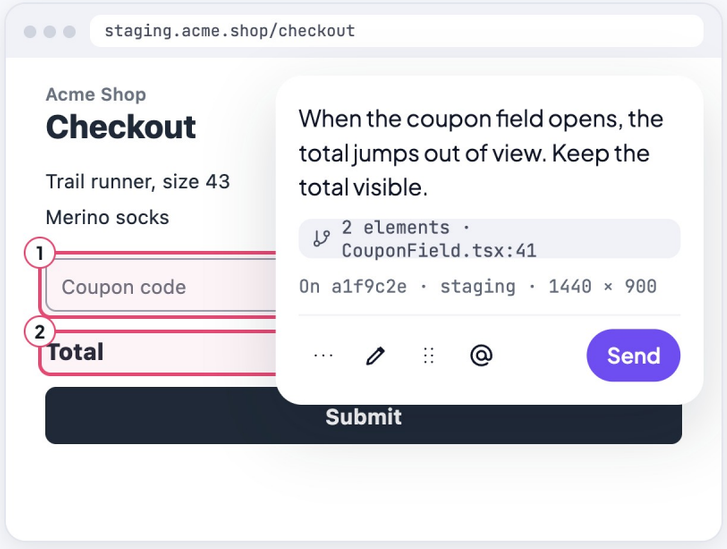

04 Say what should change

The composer opens next to what you picked. Where and when are filled in for you.

`⌘` `↵` send `@` mention

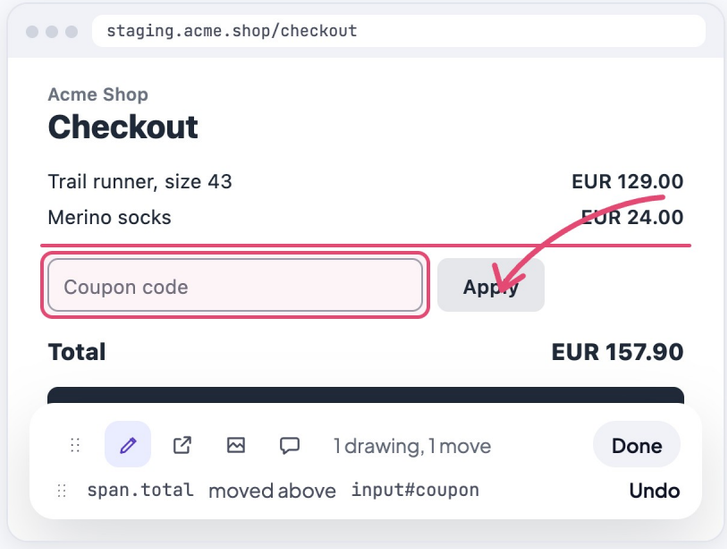

05 Draw or move, when words are not enough

The composer docks at the bottom. Moves are suggestions; the page is never changed.

`1-7` tools `⌘` `Z` undo

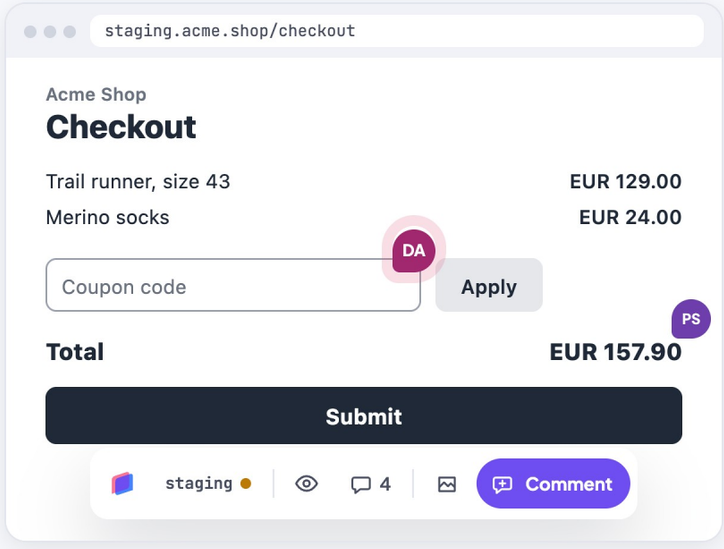

06 Send

Your pin appears on the element and everyone on the page sees it live. No toast: the pin is the confirmation.

`Esc` `Esc` park as a draft instead

RULES FOR THE WHOLE FLOW

Coral marks the page, nothing else

Outlines, tags, drawings and the drop line. HeyDiff's own toolbar and composer stay neutral.

The page is evidence

It is never recoloured, reflowed or edited. Drawings and moves are kept with the comment, not applied.

Esc steps back one level

Menu, then drawing, then the composer, then pick mode. Twice from the composer parks a draft pin.

Nothing is lost

Drafts are kept per page address, through reloads and closed tabs, until sent or discarded.

The Chrome extension

Where reviewers spend most of their time: on the running app. Picking, writing and sending are on page 28; this page covers the toolbar, its menus, the side panel and the popup. Source: heydiff-web online-release-1, screens/extension.md.

TOOLBAR

One slim bar at the bottom centre of the page under review

56 px high, 40 px controls, 16 px from the edge, never two rows. It lives in a shadow root, so it never changes or inherits the page's styles. ⌘⇧K hides and shows it.

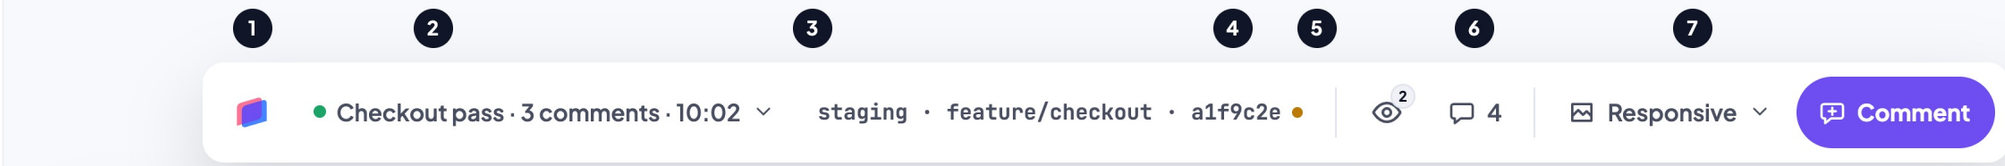

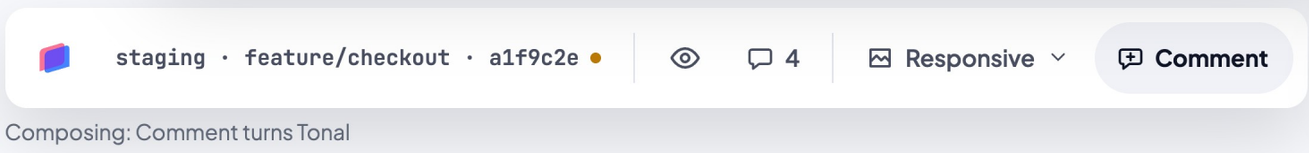

Composing: Comment turns Tonal



Narrow window: chips shorten, Comment keeps its label

1 **More**
The HeyDiff mark opens the toolbar's menu: Start Session, Open Side Panel, Open HeyDiff, Keyboard Shortcuts, Hide Toolbar.

2 **Session**
Only while a session runs: a green dot, its name, comments and start time.

3 **Context**
Environment, branch, commit, and an amber dot for uncommitted changes. Not a button; the tooltip has the full values.

4 **Visibility**
Whose pins and which statuses show. The count dot says how many are hidden.

5 **Count**
Comments on this page. Opens the side panel.

6 **Device**
The device the page is shown at. Responsive by default.

7 **Comment**
The one Filled action. Tonal while a composer is open.

TOOLBAR MENUS

Three menus, opened upward from the toolbar

Visibility

SHOW

- (•) Everyone
- ( ) Only Mine
- ( ) Hide Others

STATUS

- [x] Not Resolved 12
- [ ] Resolved 4

Show Earlier Commits
Pins made on older commits, at 60 %

Whose comments and which statuses. A choice that hides pins puts a count on the eye.

Device

Responsive	this window
MacBook Air 13"	1440 × 812
MacBook Pro 16"	1728 × 989
iPad Air	820 × 1180
iPhone 16	393 × 659

Uses Chrome's debugging bar

Custom…

Each comment records the device it was made on.

Laptops resize the window; tablets and phones emulate. The frame on the page names the device and size.

Session

Checkout pass
Dana · started 10:02 · 3 comments · 2 pages

Rename
Share…
End Session

New comments join this session.

Ending a session with drafts asks to send or discard them first. Nothing is lost.

SIDE PANEL AND POPUP

Everything about this page, beside it

This Page | Inbox 3

`/checkout`

```
staging · feature/checkout · a1f9c2e
● uncommitted changes
```

Session: **Checkout pass** · 3 comments

Not Resolved 3 | Resolved 1

DA When the coupon field opens, the total jumps out of view. — Deciding
`CouponField.tsx:41` iPhone 16

PS Say "Pay", not "Submit". — In Progress
`Checkout.tsx:88` Responsive

LK Shipping options jump on load. — Open
`Shipping.tsx:12` MacBook Air 13"

2 comments on earlier commits · Show

Open in HeyDiff

heydiff CD

Workspace

Acme › Checkout redesign

localhost:3000 · Local
acme/web · feature/checkout · ~/dev/acme-web
Repo and branch come from the HeyDiff Mac app.

Show toolbar on this site

Open Side Panel

heydiff

Sign in to comment on this page and see your team's pins.

Sign In

Side panel
This Page and Inbox. Drafts first, then the page's comments with their code and device. Open in HeyDiff is the one Filled action.

Popup
Where comments go (remembered per site), where this page comes from, and the toolbar switch. Signed out, it offers Sign In and nothing else.

Restricted pages
chrome:// pages, the Web Store and the PDF viewer never show the toolbar. The popup says why.

Offline
Picking, writing and drawing keep working. Send, replies and sessions wait, and the draft is kept.

The Mac app

A menu bar app that lets people point at elements in apps running on the Mac, Electron and React Native first, and sends the comment to the same inbox. It also tells the Chrome extension which repo serves a localhost page.

Proposal First-version scope from heydiff-context / strategy / 2026-10-29-new-mac-app-brainstorm.md. The app is new, built from scratch in its own repo, heydiff-mac. Backlog: native Mac and iOS beyond the element, Tauri, Flutter, recordings.

MENU BAR

The HeyDiff panel opens from the menu bar

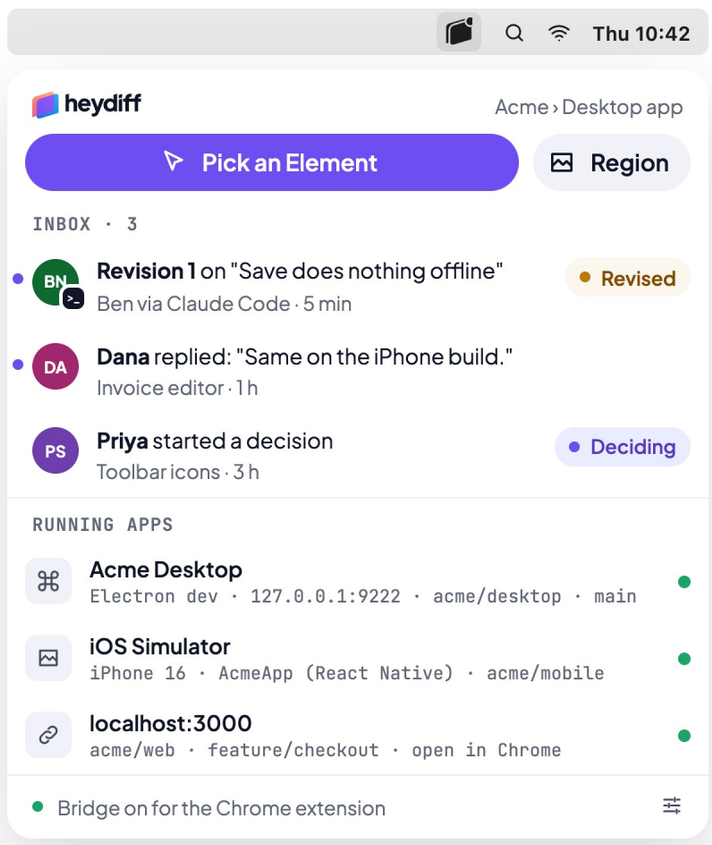

The HeyDiff panel — Selected

`Frameless window under the icon`

How it behaves

- A click on the icon opens it under the icon; a second click, Esc or a click outside closes it.
- It takes keyboard focus while open: ↑ ↓ move through the rows, Enter opens one.
- ⌥⇧C starts picking from anywhere, panel open or not.
- The icon shows a dot when something waits for you.

What it shows

- Pick an Element and Region at the top.
- The inbox, newest first: who, what, where and the status. A dot marks unread.
- Running apps: Electron dev builds on 127.0.0.1, the iOS Simulator, and local dev servers, which open in Chrome.
- The bridge line says when the Chrome extension can ask which repo and branch serve a localhost page.

Holds

- An account is required. There is no offline mode; agents fetch comments over MCP.

Selected on 30 Oct 2026 over a native macOS menu and click-to-pick. The native menu stays the fallback if the panel costs too much.

MENU BAR ICON

The knockout mark, as a template image

The knockout mark — Selected

`Template, monochrome`

- A template image: black shapes on transparent. macOS tints it for light and dark menu bars and for the highlight.
- The front bubble is cut out of the back one, so the two bubbles read apart without colour.
- 16 pt glyph in a 22 pt area; the menu bar is 24 pt high.
- Export 16 by 16 and 32 by 32 px. In Electron the file name ends in Template (`iconTemplate.png`, `iconTemplate@2x.png`) so macOS treats it as a template.
- Never the colour mark in the menu bar. Colour pulls the eye all day and clashes with tinted menu bars.

STATES

Idle — **Something waits** — **Picking or menu open** — **Signed out or offline**

Something waits: a dot cut into the corner, never a count. Signed out or offline: 35 % opacity, the way macOS shows a disabled item.

POINTING AT DESKTOP AND MOBILE APPS

The Chrome extension, for everything that is not Chrome

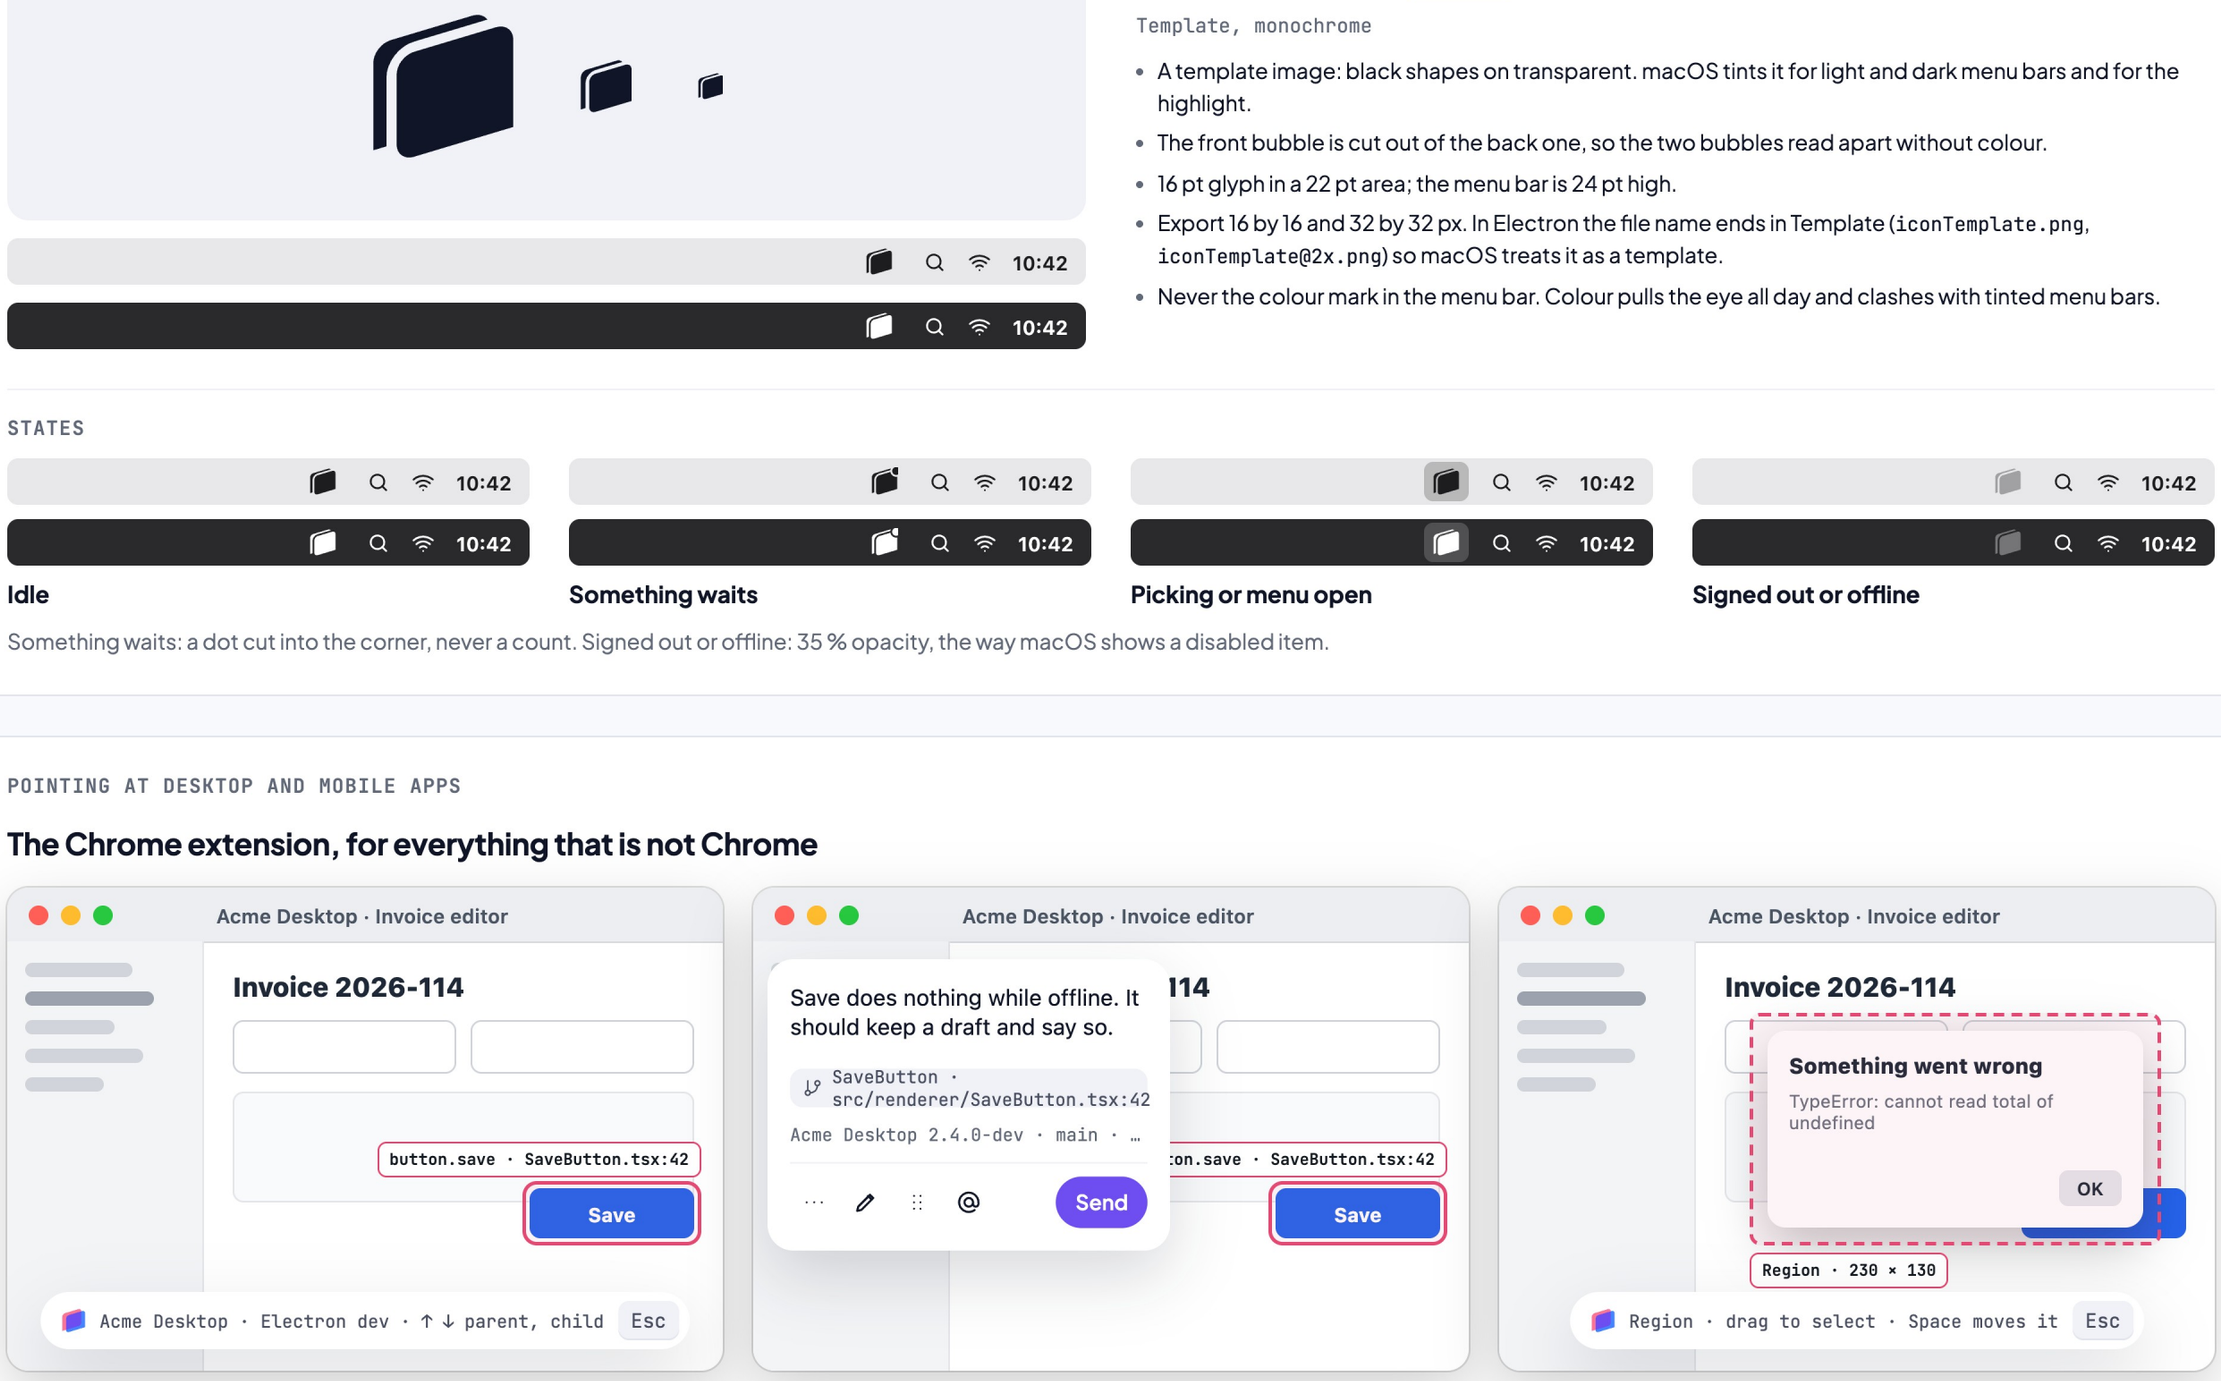

01 Pick in a running app

Hover outlines the element in the Electron dev build; the tag carries the component, file and line.

02 Comment and draw

The same composer as the extension, with the app, version, branch and commit filled in.

03 Or capture a region

For what is not an element: a crash dialog, a canvas, a whole screen.

React Native in the Simulator

The element comes from React DevTools; the file and line from the component.

04 The iOS Simulator

React Native apps in the Simulator work the same way.

05 Shoot again after the fix

A macOS notification when the agent reports a revision. HeyDiff captures the same element again, so before and after line up by themselves.

06 Permissions and trust

Screen Recording and Accessibility, each asked the first time it is needed, never at install.

One comment, from pin to resolved

The whole product in five steps, built only from the components on pages 17 to 27. Each status change is caused by a person, except In Progress and Revised, which the agent reports.

01

Pin

Open

Dana, designer

Points at the field on staging and says what is wrong. HeyDiff keeps the element, file, commit and device.

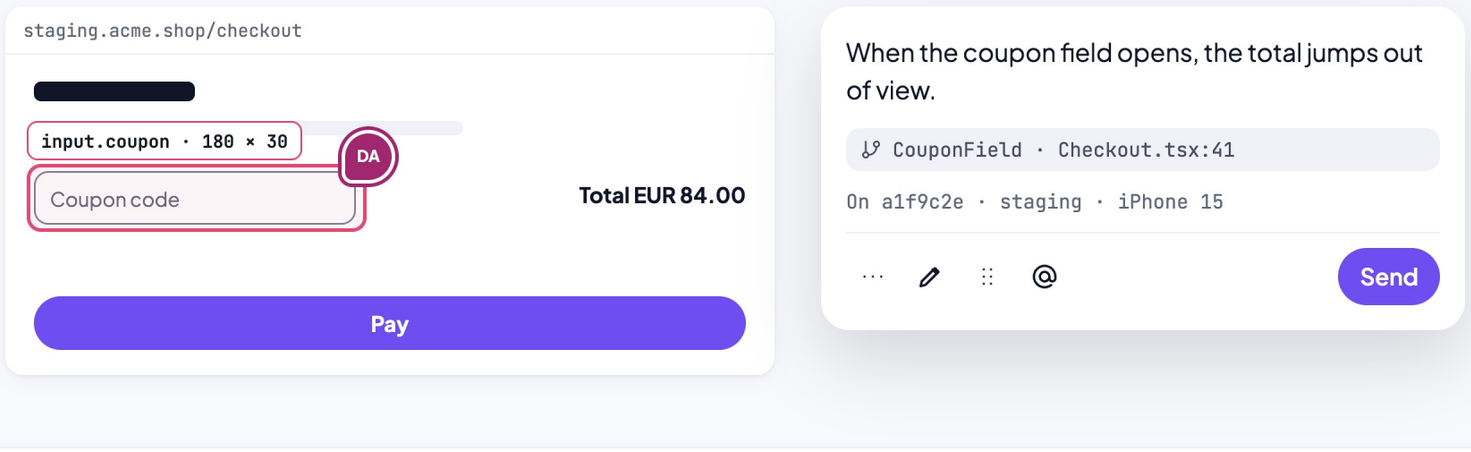

02

Discuss

Open > Deciding > Open

Lukas, client (guest), and Priya, PM

The team replies on the same pin. There are two ways to fix it, so they vote. Priya decides, and the comment is Open again with the decision on it.

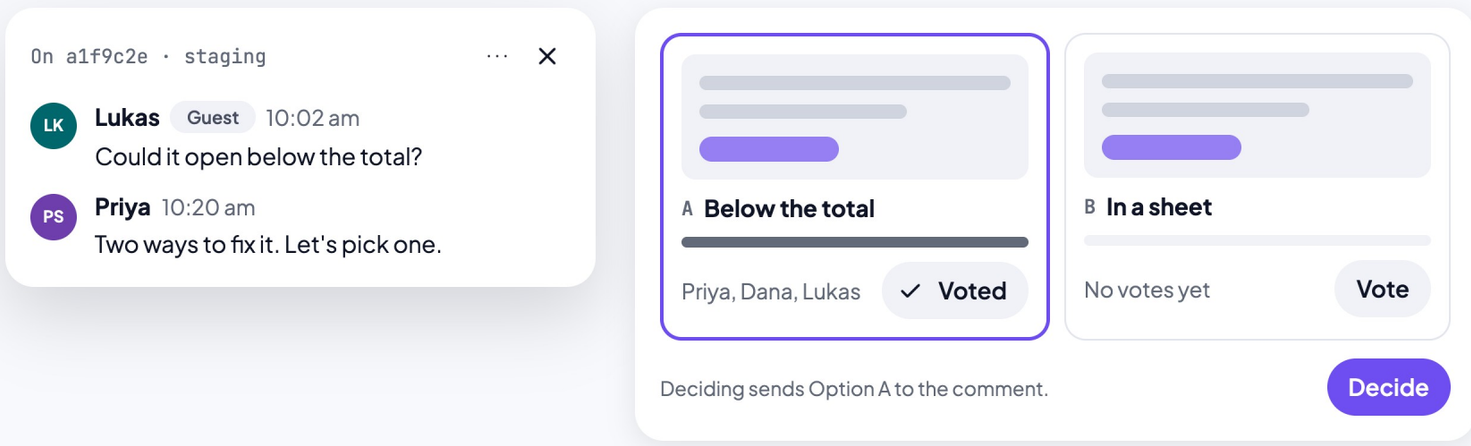

03

Hand off

Open > In Progress

Ben, engineer, and his agent

Ben asks his agent to work through the open comments. It reads them over MCP, claims #2 and builds Option A.

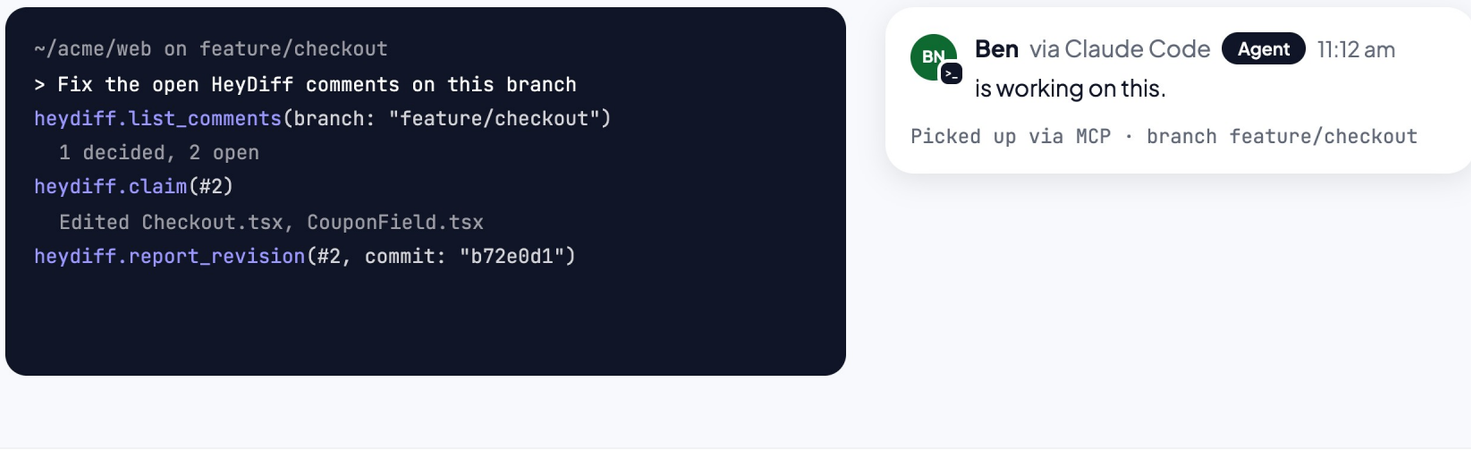

04

Check

In Progress > Revised

Dana, who asked

The revision lands in Dana's Inbox. She compares before and after on the same region at the same scale.

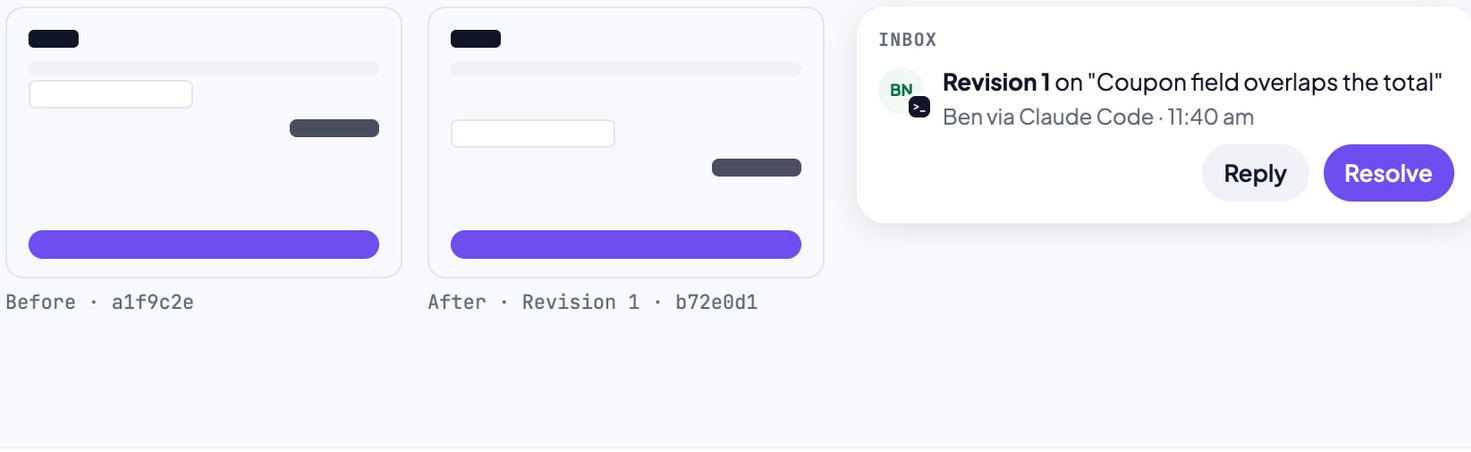

05

Resolve

Revised > Resolved

Dana

It looks the way she pictured it. She resolves it; the pin goes, the trail stays, and anyone can see why it changed.

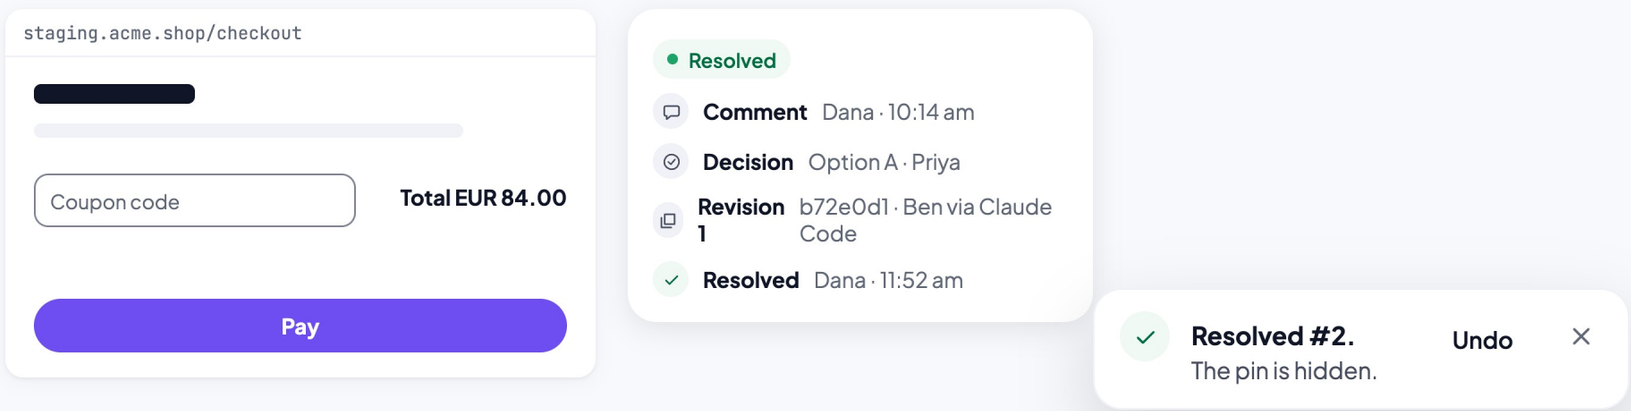

One comment, from pin to resolved

The whole product in five steps, built only from the components on pages 17 to 27. Each status change is caused by a person, except In Progress and Revised, which the agent reports.

01

Pin

Open

Dana, designer

Points at the field on staging and says what is wrong. HeyDiff keeps the element, file, commit and device.

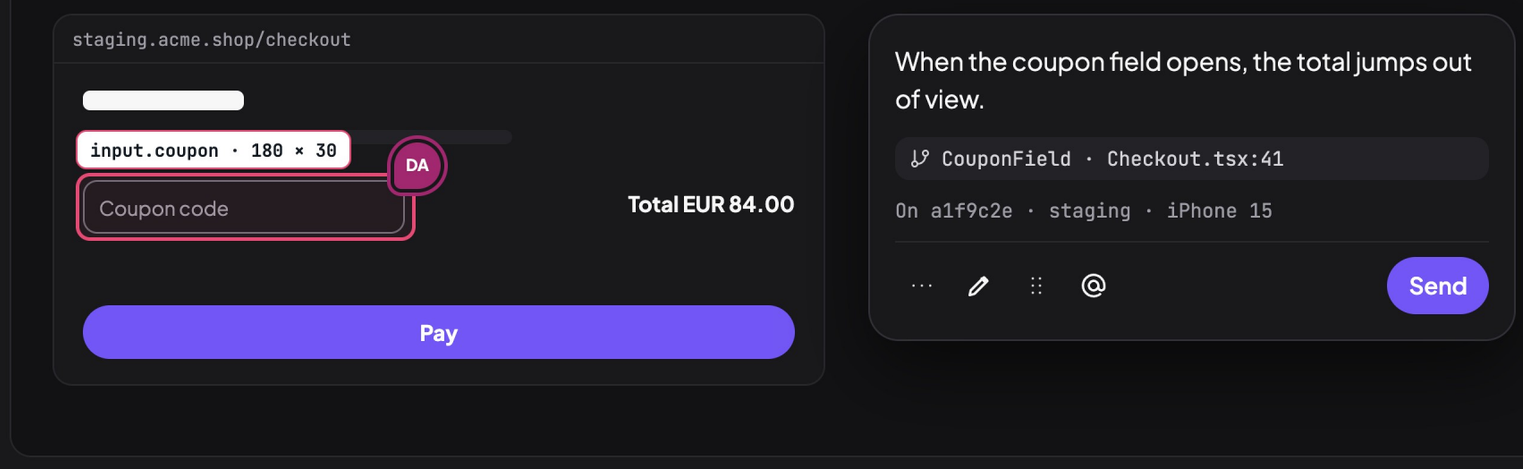

02

Discuss

Open > Deciding > Open

Lukas, client (guest), and Priya, PM

The team replies on the same pin. There are two ways to fix it, so they vote. Priya decides, and the comment is Open again with the decision on it.

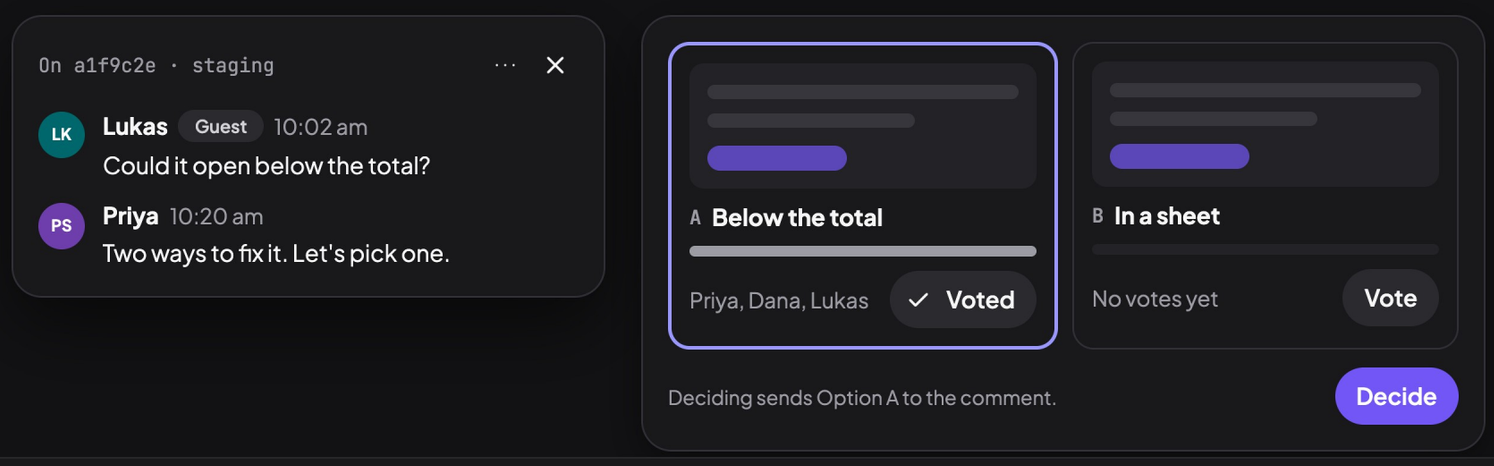

03

Hand off

Open > In Progress

Ben, engineer, and his agent

Ben asks his agent to work through the open comments. It reads them over MCP, claims #2 and builds Option A.

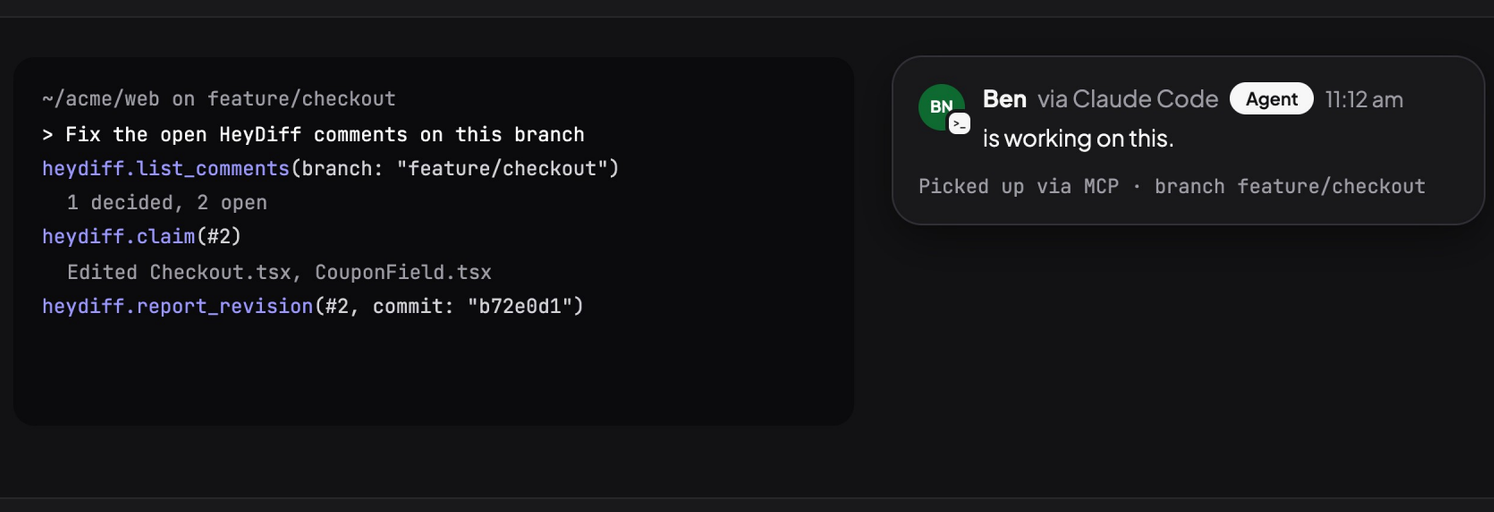

04

Check

In Progress > Revised

Dana, who asked

The revision lands in Dana's Inbox. She compares before and after on the same region at the same scale.

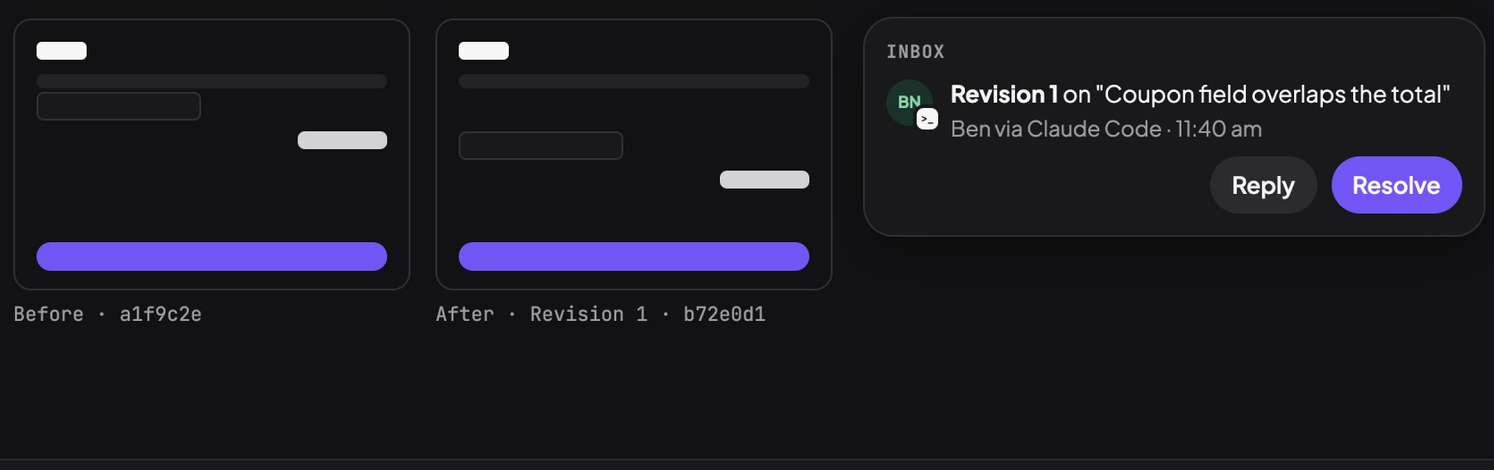

05

Resolve

Revised > Resolved

Dana

It looks the way she pictured it. She resolves it; the pin goes, the trail stays, and anyone can see why it changed.

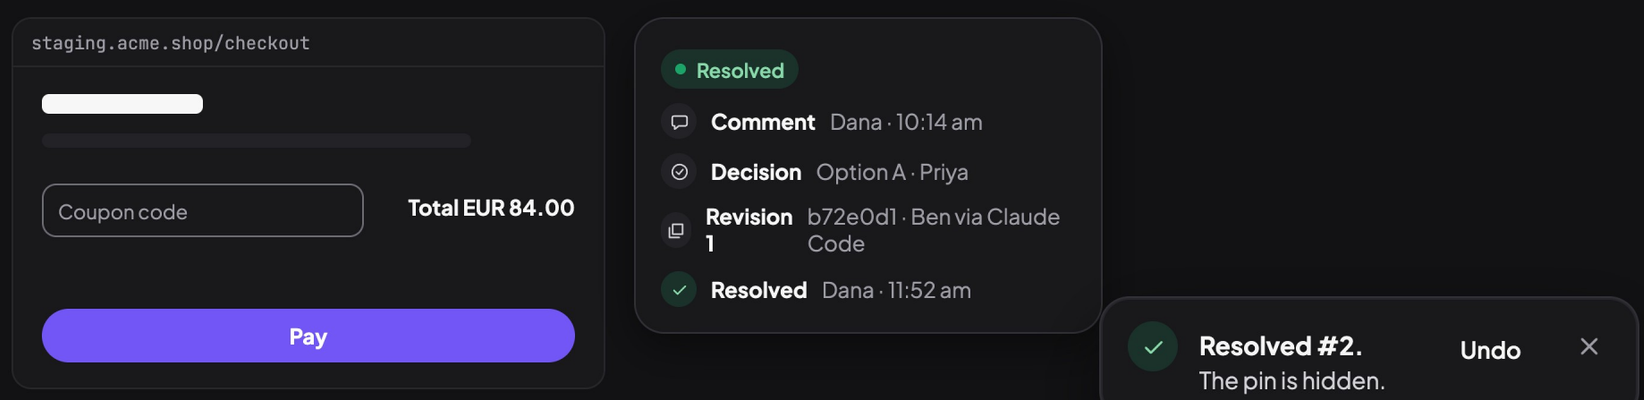

The same comment on a phone

People read, reply, decide, check and resolve from their phones. Placing pins stays on a computer. Drawn at full size, 390 x 844.

01 Pin · Open

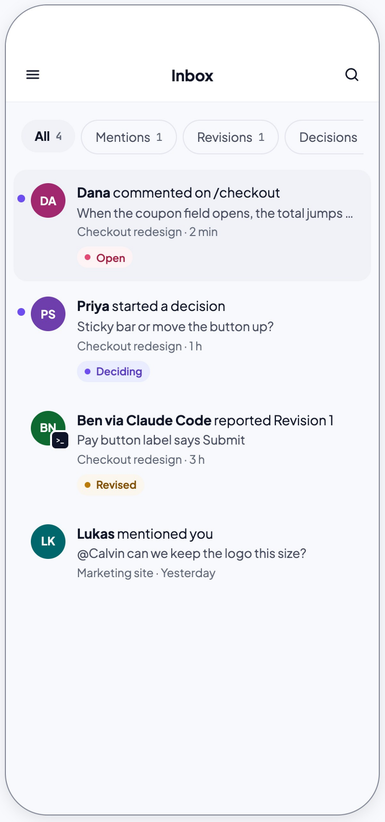

Dana placed the pin on her laptop. On the phone it arrives in the Inbox, newest first, unread marked.

02 Discuss · Open

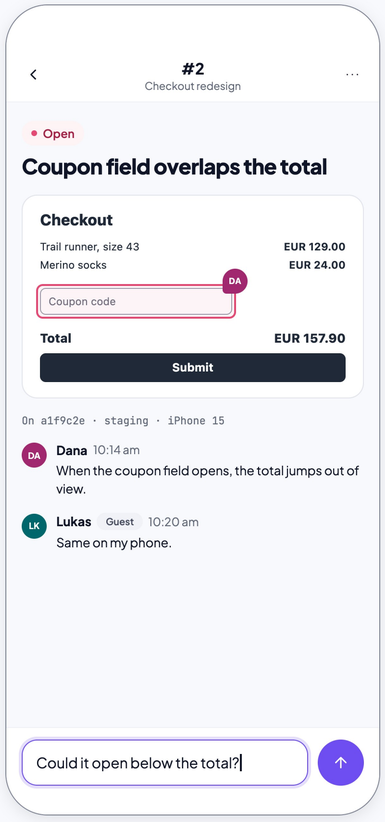

The screenshot with the outline and pin, the thread, and a reply field that stays above the keyboard.

03 Discuss · Deciding

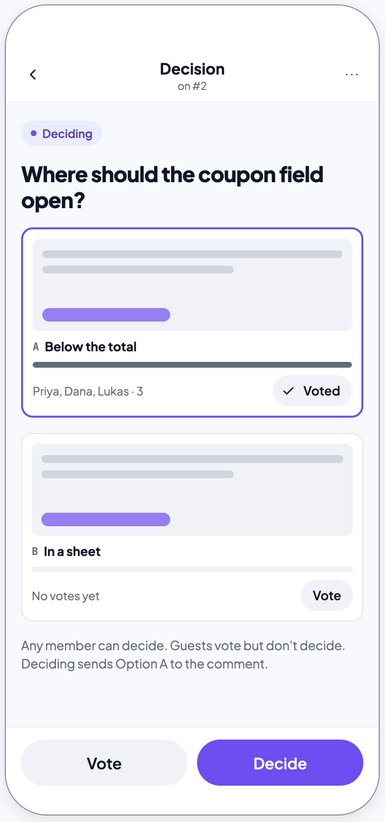

Options stack full width. Vote and Decide sit in the bottom bar, 48 px.

04 Hand off · In Progress

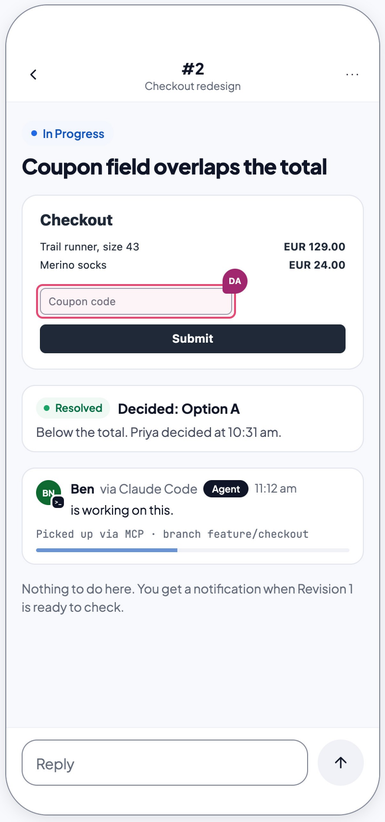

The decision and the agent's line, in the thread. Nothing to do but wait.

05 Check · Revised

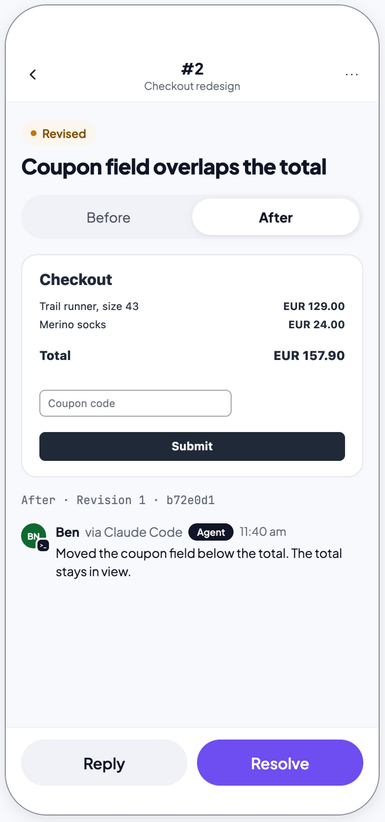

Before or After, one at a time, same region and scale. Resolve is the one Filled action.

06 Resolve · Resolved

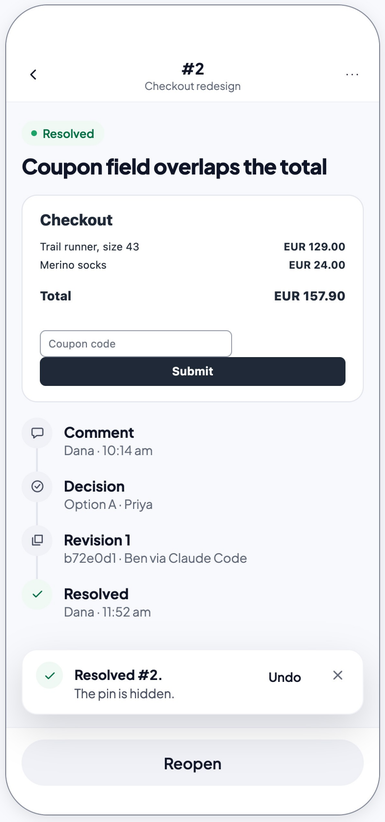

The trail shows why it changed. The toast sits above the bottom bar with Undo.

WHAT CHANGES UNDER 640 PX

- Same flow, words and statuses as page 31.
- Every primary action is a 48 px button in the bottom bar.
- Targets 44 px or more. Nothing only on hover.
- The customer's screenshot is never cropped to fit; it scales.

Works on a larger screen
Placing pins, drawing and moving need a computer. We can email you a link to open there.

Email me the link

EXAMPLE Shows the design system in use. Navigation, data and actions are illustrative. The product spec lives in heydiff-web.

Comments 57

Web shop, across production, staging and two previews.

Open comments	In progress	Revised, to check	Resolved this week
24	9	5	31
6 new this week	2 agents asking a question	Oldest: 2 days	Checked by a person

All 57 | Open 24 | Deciding 7 | In Progress 9 | Revised 5 | Resolved 12

Filter

Comment	Status	Version	Assignee	Updated
Pay now sits below the fold /checkout / Pay now	Deciding	staging a1f9c2e	MK Maya Product lead	2:14 pm
Wrong currency on invoices /billing / Invoice table	Revised	production 7c02d1f	JS Jonas Engineer	1:52 pm
Empty state copy is too long /projects / Empty state	In Progress	preview PR #488	PR Priya via Codex	11:08 am
Coupon field hides the total /checkout / Summary	Open	staging a1f9c2e	LW Lukas Client	10:41 am
Sticky bar overlaps cookie notice /checkout / Footer	Open	preview PR #491	JS Jonas via Claude Code	9:20 am
Logo too small on mobile header / / Header	Resolved	production 9e41b0a	LW Lukas Client	Yesterday
Shipping step asks for phone twice /checkout / Address	Open	local 3d88e21	PR Priya Designer	Yesterday

2 selected / showing 7 of 57

Show 50 more

Activity

See all

- JS **Jonas via Claude Code** opened PR #491 for "Sticky bar overlaps cookie notice". 12 min ago
- MK **Maya** decided option A on "Pay now sits below the fold". 38 min ago
- PR **Priya** pointed at the coupon field on staging. 1 h ago
- MK **Maya** resolved "Logo too small on mobile header". Yesterday
- PR **Priya via Codex** shortened the empty state in PR #488. Yesterday

Claude Code asks on #3: should the bar stick on desktop too?

EXAMPLE Shows the design system in use. Navigation, data and actions are illustrative. The product spec lives in heydiff-web.

Comments 57

Web shop, across production, staging and two previews.

Open comments	In progress	Revised, to check	Resolved this week
24	9	5	31
6 new this week	2 agents asking a question	Oldest: 2 days	Checked by a person

All 57 | Open 24 | Deciding 7 | In Progress 9 | Revised 5 | Resolved 12

Filter

Comment	Status	Version	Assignee	Updated
Pay now sits below the fold /checkout / Pay now	Deciding	staging a1f9c2e	MK Maya Product lead	2:14 pm
Wrong currency on invoices /billing / Invoice table	Revised	production 7c02d1f	JS Jonas Engineer	1:52 pm
Empty state copy is too long /projects / Empty state	In Progress	preview PR #488	PP Priya via Codex	11:08 am
Coupon field hides the total /checkout / Summary	Open	staging a1f9c2e	LW Lukas Client	10:41 am
Sticky bar overlaps cookie notice /checkout / Footer	Open	preview PR #491	JS Jonas via Claude Code	9:20 am
Logo too small on mobile header / / Header	Resolved	production 9e41b0a	LW Lukas Client	Yesterday
Shipping step asks for phone twice /checkout / Address	Open	local 3d88e21	PR Priya Designer	Yesterday

2 selected / showing 7 of 57

Show 50 more

Activity

See all

Jonas via Claude Code opened PR #491 for "Sticky bar overlaps cookie notice".
12 min ago

Maya decided option A on "Pay now sits below the fold".
38 min ago

Priya pointed at the coupon field on staging.
1 h ago

Maya resolved "Logo too small on mobile header".
Yesterday

Priya via Codex shortened the empty state in PR #488.
Yesterday

Claude Code asks on #3: should the bar stick on desktop too?

Build what you pictured.

You bring the taste, your team brings the eye, your agent brings the speed. HeyDiff keeps all three pulling in the same direction, from the first hey to the final diff.

Add to Chrome
Start free

Free for makers. No credit card. Teams from EUR 4 per seat a month.

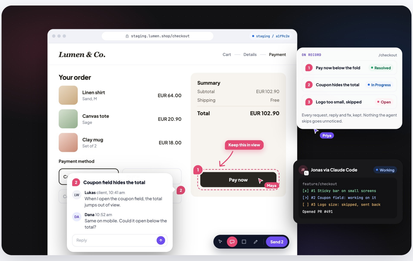

TODAY

AI builds in minutes. Making it yours still takes forever.

Somewhere between what you see and what the agent builds, things get lost. So you explain again, chase again, and slowly stop enjoying it.

Which button do you mean?

Feedback travels as screenshots and chat messages and loses its place on the way.

I already said that.

You explain the same fix a third time because the agent forgot the first two.

Wait, did it do all of it?

Five things asked, three done. Nobody notices the other two until a customer does.

Where did we say that?

Feedback lives in Slack, calls and prompts. Almost none of it is kept.

BEFORE AND AFTER

What you saw, fixed the way you meant it.

One comment from start to finish: the page as Dana saw it, the page after the fix, and everyone who helped in between. The agent did the work. People said it was right.

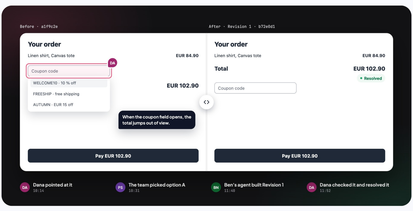

STORIES

However you build, it ends up yours.

For teams
For makers
Built for agents

FOR TEAMS

Build it together again.

At turned building into something one person does at a keyboard. HeyDiff brings back the designer's eye, the PM's judgement and the client's voice, so what you ship feels like the whole team made it.

FOR MAKERS

Feel in control agent builds.

Say what you want once and the agent is held to every word, no next idea, not into chasing the

HOW IT WORKS

From the first hey to the final diff.

Everything happens on your running app, where the feedback belongs.

01 / POINT

Point at it

Open your app on localhost, a preview or production and join a comment on what is off. Draw when words are slow.

02 / DISCUSS

Bring in your team

Invite teammates and clients to the same page. Everyone adds what they see, replies on the spot and agrees on what matters.

03 / HAND OFF

Hand it to the agent

Your coding agent gets every request with the screenshot, the element and the version. HeyDiff tracks which ones were done, skipped or asked about. Whether it is right stays your call.

04 / CHECK AND KEEP

See it fixed, keep the record

Every change comes back as before and after. Each request, reply and fix stays on record.

Pins and drawings
On the live page: localhost, previews and production.

Replies and guests
Teammates and clients reply on the spot. Guests are free.

Headless first
Everything works over MCP and API, so agents can do it without the app.

Your coding agent
Claude Code, Codex and Cursor fetch and answer feedback.

Your repo
Each revision links its commit and pull request back to the comment.

Before and after
Each change comes back with its pull request to check.

Private before upload
Emails, keys and tokens are pixelated on your device before upload.

Hosted in the EU
Compute in Belgium, storage in the EU.

Headless first. Built for agents. Works over MCP

Works with: Claude Code · Codex · Cursor · GitHub and any agent that speaks MCP.

PRICING

Free while it is just you. Fair when your team joins.

The Chrome extension and the Mac app are free. Guests never pay.

Yearly save 33 percent
Monthly

Free

EUR 0

for one person

For solo builders who steer their own agent.

Start free

- Chrome extension and Mac app
- Pin, draw and comment on any page
- Hand feedback to your agent
- Feedback kept for 30 days

Team

For teams

EUR 4

per seat a month, billed yearly. EUR 6 monthly.

For teams that give feedback together and ship with agents.

Create a team

- Everything in Free
- Invite your team, plus 5 free guests per seat
- Replies, votes and the full record
- Admin, company domain and audit export
- Kept 365 days after the last activity

Enterprise

Custom

coming later

For companies with single sign-on and procurement rules.

Talk to us

- Everything in Team
- SAML single sign-on and SCIM
- Data processing agreement

FAQ

Questions, answered.

Is it free?
Yes, for one person. Capture, comment and hand feedback to your agent at no cost. Your team joins on the Team plan.

Does it work on localhost?
Yes. Localhost, previews and production. With the Mac app running, each comment also knows its repo and branch.

Which agents work with it?

Where does our data live?

What about private data on screen?

Do clients and guests pay?

Build what you pictured.

Start on your own for free. Bring your team in when you are ready.

Add to Chrome
Start free

© 2026 HeyDiff

Build what you pictured.

You bring the taste, your team brings the eye, your agent brings the speed. HeyDiff keeps all three pulling in the same direction, from the first hey to the final diff.

Add to Chrome
Start free

Free for makers. No credit card. Teams from EUR 4 per seat a month.

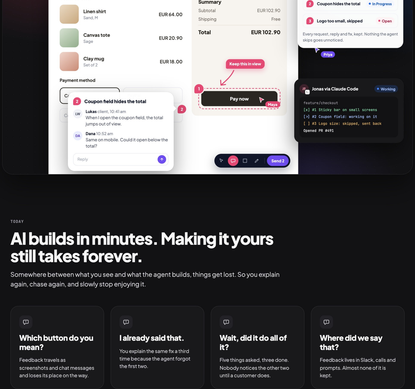

TODAY

AI builds in minutes. Making it yours still takes forever.

Somewhere between what you see and what the agent builds, things get lost. So you explain again, chase again, and slowly stop enjoying it.

Which button do you mean?
Feedback travels as screenshots and chat messages and loses its place on the way.

I already said that.
You explain the same fix a third time because the agent forgot the first two.

Wait, did it do all of it?
Five things asked, three done. Nobody notices the other two until a customer does.

Where did we say that?
Feedback lives in Slack, calls and prompts. Almost none of it is kept.

BEFORE AND AFTER

What you saw, fixed the way you meant it.

One comment from start to finish: the page as Dana saw it, the page after the fix, and everyone who helped in between. The agent did the work. People said it was right.

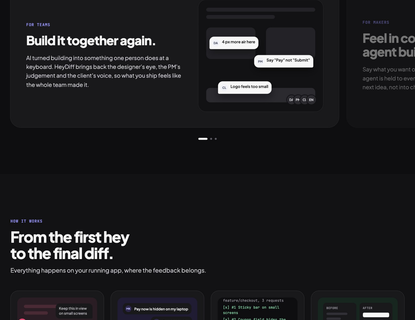

STORIES

However you build, it ends up yours.

For teams
For makers
Built for agents

FOR TEAMS

Build it together again.

At turned building into something one person does at a keyboard. HeyDiff brings back the designer's eye, the PM's judgement and the client's voice, so what you ship feels like the whole team made it.



FOR MAKERS

Feel in control as agent builds.

Say what you want once and the agent is hard to every word, so the next idea, not into chasing the

HOW IT WORKS

From the first hey to the final diff.

Everything happens on your running app, where the feedback belongs.

01 / POINT

Point at it
Open your app on localhost, a preview or production and pin a comment on what is off. Draw when words are slow.



02 / DISCUSS

Bring in your team
Invite teammates and clients to the same page. Everyone adds what they see, replies on the spot and agrees on what matters.



03 / HAND OFF

Hand it to the agent
Your coding agent gets every request with the screenshot, the element and the version. HeyDiff tracks which ones were done, skipped or asked about. Whether it is right stays your call.



04 / CHECK AND KEEP

See it fixed, keep the record
Every change comes back as before and after. Each request, reply and fix stays on record.

Pins and drawings
On the live page: localhost, previews and production.

Replies and guests
Teammates and clients reply on the spot. Guests are free.

Headless first
Everything works over MCP and API, so agents can do it without the app.

Your coding agent
Claude Code, Codex and Cursor fetch and answer feedback.

Your repo
Each revision links its commit and pull request back to the codebase.

Before and after
Each change comes back with its pull request to check.

Private before upload
Emails, keys and tokens are pixelated in your device before upload.

Hosted in the EU
Compute in Belgium, storage in the EU.

Headless first. Built for agents. Works over MCP

Works with Claude Code · Codex · Cursor · GitHub and any agent that speaks MCP.

PRICING

Free while it is just you. Fair when your team joins.

The Chrome extension and the Mac app are free. Guests never pay.

Yearly save 33 percent
Monthly

Free
EUR 0
for one person

For solo builders who steer their own agent.

Start free

- Chrome extension and Mac app
- Pin, draw and comment on any page
- Hand feedback to your agent
- Feedback kept for 30 days

Team
For teams
EUR 4
per seat a month, billed yearly. EUR 6 monthly.

For teams that give feedback together and ship with agents.

Create a team

- Everything in Free
- Invite your team, plus 5 free guests per seat
- Replies, votes and the full record
- Admin, company domain and audit export
- Kept 365 days after the last activity

Enterprise
Custom
coming later

For companies with single sign-on and procurement rules.

Talk to us

- Everything in Team
- SAML single sign-on and SCIM
- Data processing agreement

FAQ

Questions, answered.

Is it free?
Yes, for one person. Capture, comment and hand feedback to your agent at no cost. Your team joins on the Team plan.

Does it work on localhost?
Yes. Localhost, previews and production. With the Mac app running, each comment also knows its repo and branch.

Which agents work with it?

Where does our data live?

What about private data on screen?

Do clients and guests pay?

Build what you pictured.

Start on your own for free. Bring your team in when you are ready.

Add to Chrome
Start free

Footer on a phone

Under 720 px the brand comes first, the two link columns sit side by side, and the legal links wrap below.

LIGHT / 390 PX

heydiff

From the first hey
to the final diff.

Product

How it works
Pricing
Chrome extension
Mac app

Resources

MCP setup
Changelog
Status
Contact

Made with ♥ in Hamburg.

Privacy Terms Imprint © 2026 HeyDiff

DARK / 390 PX

heydiff

From the first hey
to the final diff.

Product

How it works
Pricing
Chrome extension
Mac app

Resources

MCP setup
Changelog
Status
Contact

Made with ♥ in Hamburg.

Privacy Terms Imprint © 2026 HeyDiff

Files, owners and changes

Where the masters are, who decides, and how a change gets into both this guide and the code.

LOGO FILES, VERSION 4

Six SVG masters, ready to download

Primary lockup

Paper and light backgrounds

`heydiff-logo-primary.svg`

Reverse lockup

Ink and dark backgrounds

`heydiff-logo-reverse.svg`

Flat lockup

One-colour print, merch, under 24 px

`heydiff-logo-flat.svg`

Mono white

Photos, video, single-colour on dark

`heydiff-logo-mono-white.svg`



Mark

Mark alone, 24 px and larger

`heydiff-mark.svg`



Flat mark

Favicon and anything under 24 px

`heydiff-mark-flat.svg`

The full set, with mono versions, wordmarks, app icons, PNG exports and a README, is in heydiff-context / brand / v4. Earlier exports are retired: the 03A pack, the logo v1 and v2 folders, and brand v3 with mark F. The spacing diagram is on page 04.

WHERE THINGS LIVE

One source for each thing

This guide	`HeyDiff Brand Guide canvas` Brand, foundations, components, journeys. Pages 00 to 35.
Logo files	`heydiff-context / brand / v4` SVG masters, PNG exports, app icons, README. A new version gets a new folder.
Tokens	`heydiff-kit / packages/tokens` tokens.css, heroui-theme.css, motion.json. Lint fails raw values.
Components	`heydiff-kit / packages/ui` Button kinds, ButtonRow, dialogs, tables, command menu and the rest.
Product spec	`heydiff-web / changes / online-release-1 / spec` colour.md, motion.md, interaction.md, screens.
Words	`heydiff-web / docs / ux / glossary-proposal.md` Comment, Pin, Revision, Decision; the five statuses.
Extension	`heydiff-web / changes / online-release-1 / spec / screens / extension.md` Toolbar, pick mode, composer, side panel, popup. Lasting rules in heydiff-web / docs / ux.
Mac app	`heydiff-context / strategy / 2026-10-29-new-mac-app-brief.md` Scope of the new app. Its own repo, heydiff-mac, holds the spec once it exists.
Audience	`heydiff-context / audience, market` Audiences, personas, jobs to be done, marketing brief.
Fonts	`Google Fonts` Plus Jakarta Sans and JetBrains Mono, both SIL Open Font Licence.

OWNERSHIP AND CHANGES

One owner. Changes go through the page.

CD

Calvin Dudek
Owner of the brand, this guide and heydiff-kit tokens

1. **Comment**
   Leave a comment on the page you want changed, and send it to the owner.
2. **Decide**
   The owner accepts, changes or declines it in the thread.
3. **Change both**
   The page and heydiff-kit change together. A rule that lives only on the canvas is not a rule yet.
4. **Log it**
   Add a line below and bump the version: v4.1 adds, v5 changes a rule.

CHANGE LOG

v4	30 Oct 2026	Logo. Mark A, coral left, replaces mark F: each bubble keeps one square corner instead of a curved tail. Every page, logo file and app icon changes; mark F stays on page A2 for reference. The Mac app: icon A, the knockout mark, and the HeyDiff panel from the menu bar.
v3.1	30 Oct 2026	Second review. One meaning for ⌘K, shortcut rules, rendered hover colours, backdrops under their surfaces, focus rules per surface, downloadable logo files, conversation compositions. New pages: code and selections, giving feedback, the Chrome extension, the Mac app. The wordmark stays one colour.
v3	29 Oct 2026	Brand guide. Contents, positioning, artwork, visual language, templates, layout and tokens, component families, HeyDiff components and the journey. Statuses follow the product glossary. Kit decisions: violet accent and focus, Plus Jakarta Sans, 32 / 40 / 48, pill buttons, ripple, solid red danger, violet links.
v2	29 Oct 2026	Brand identity. Palette, product colour with the Graphite dark mode, type, voice, components, example screen, landing page.